

FIG. 1A

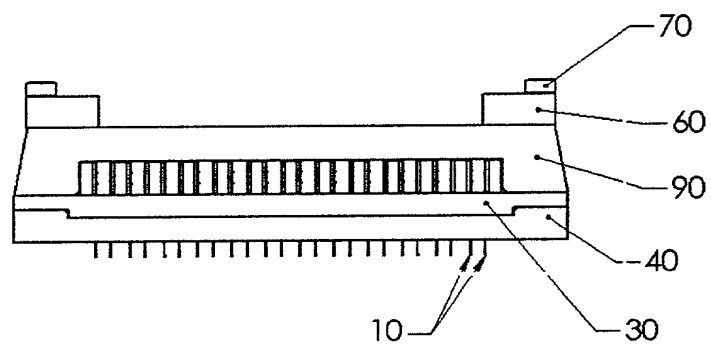


FIG. 1B

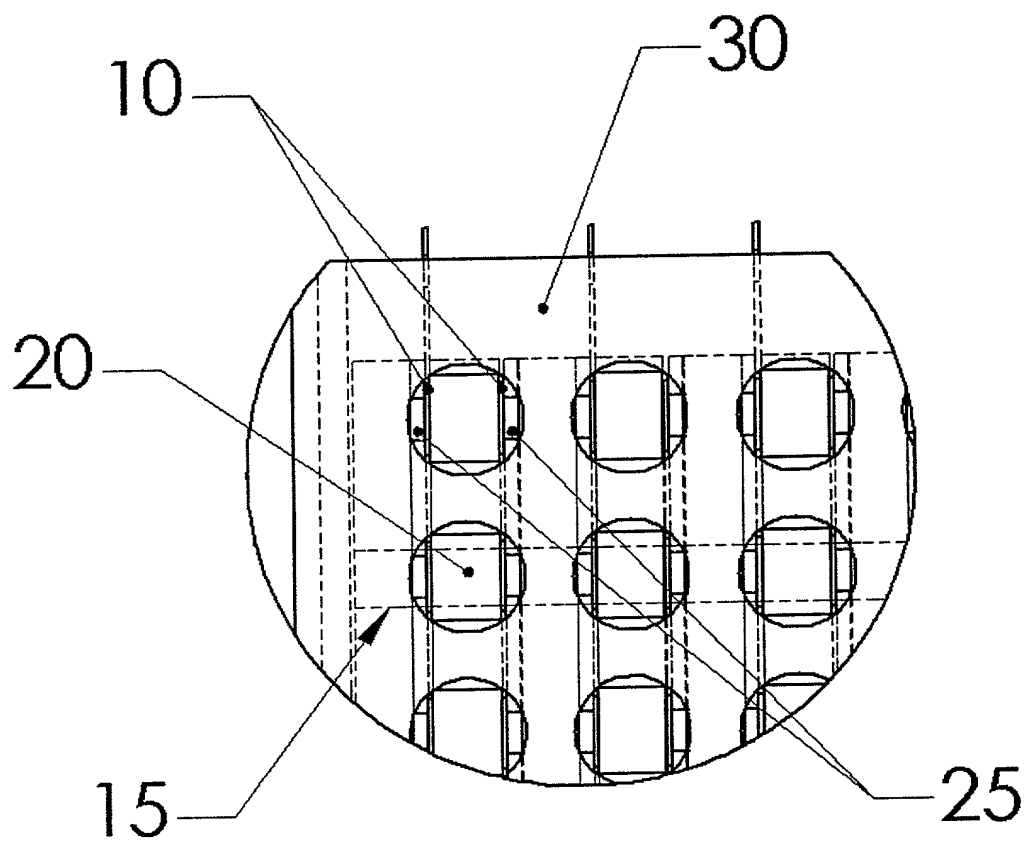


FIG. 1C

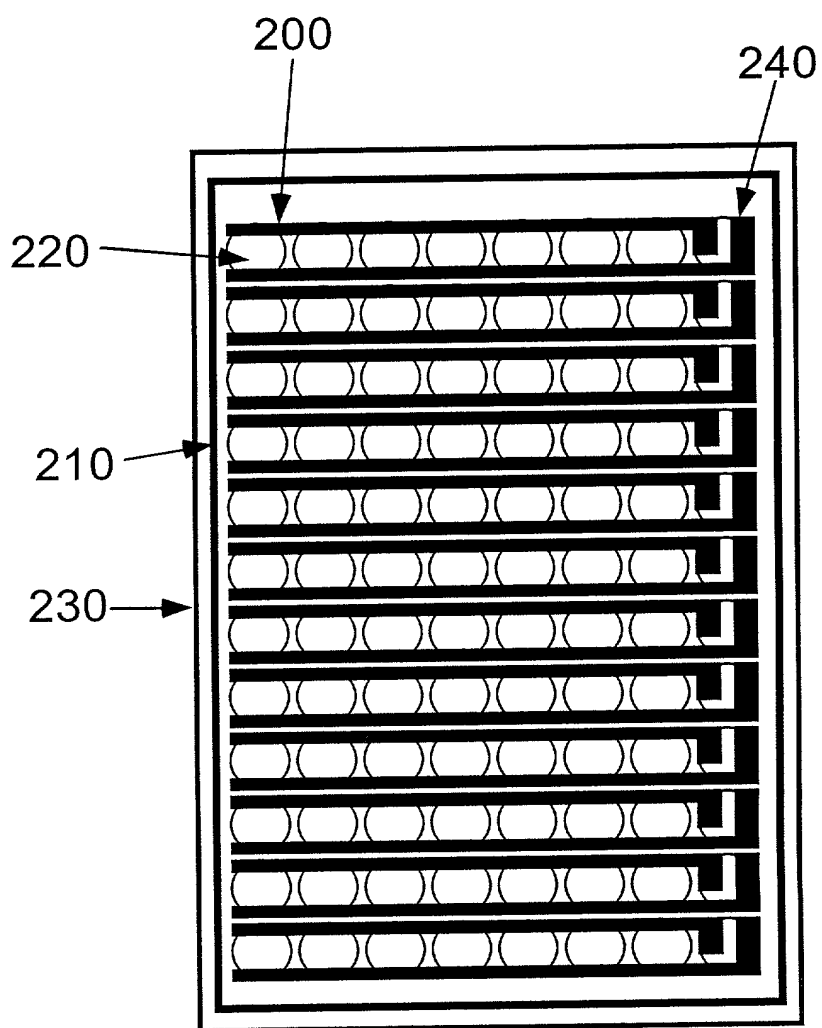


FIG. 2A

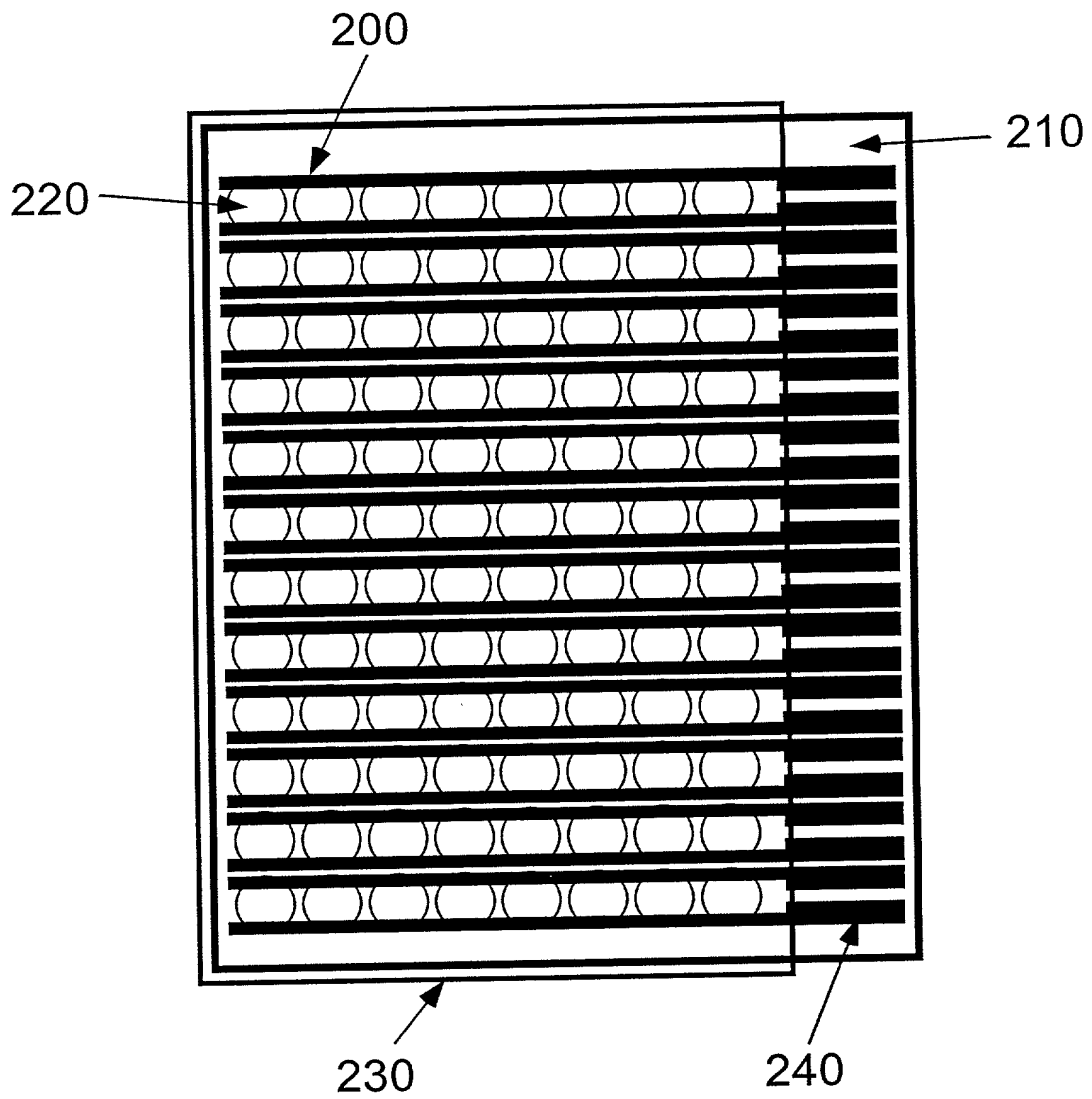


FIG. 2B

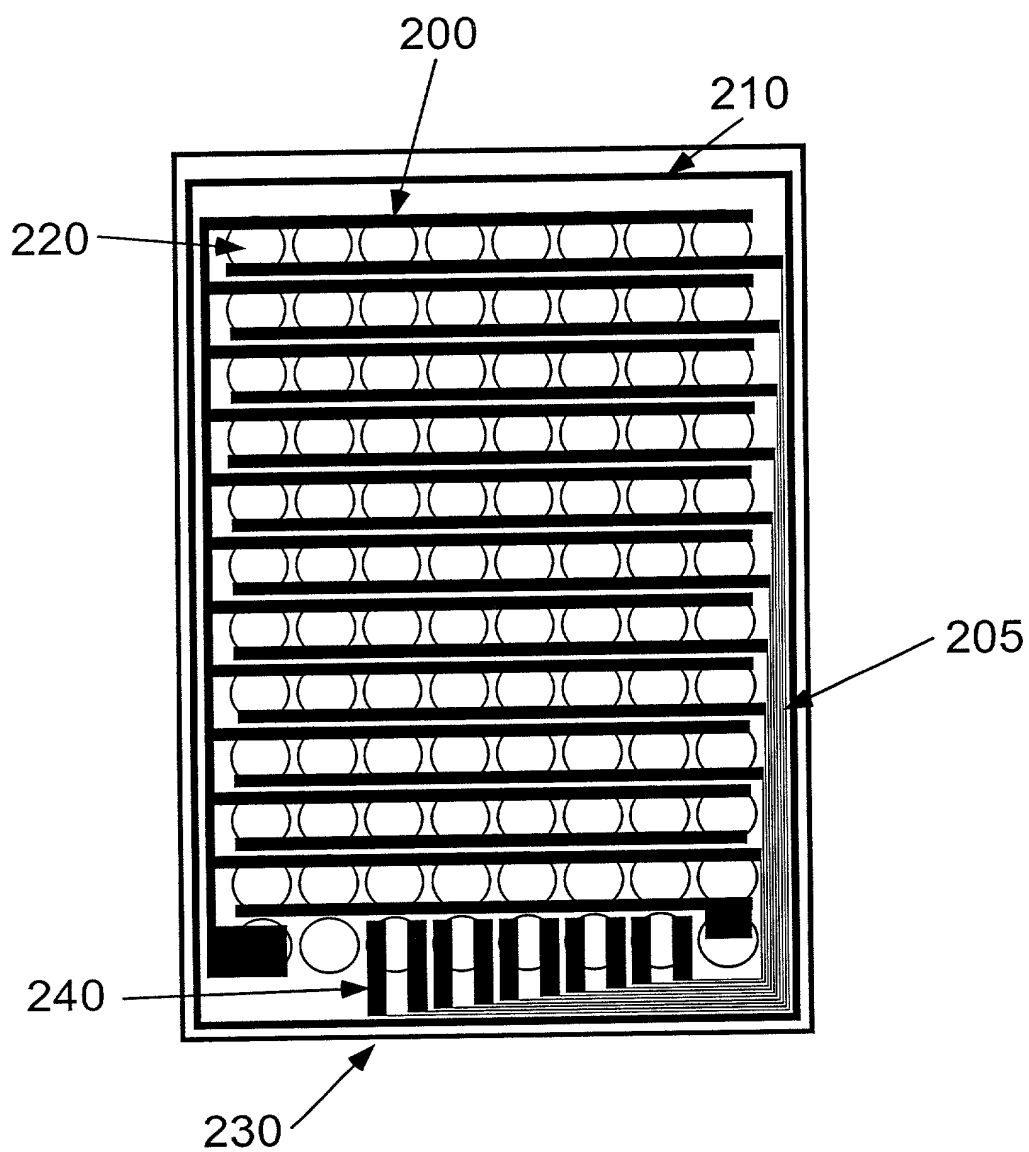


FIG. 2C

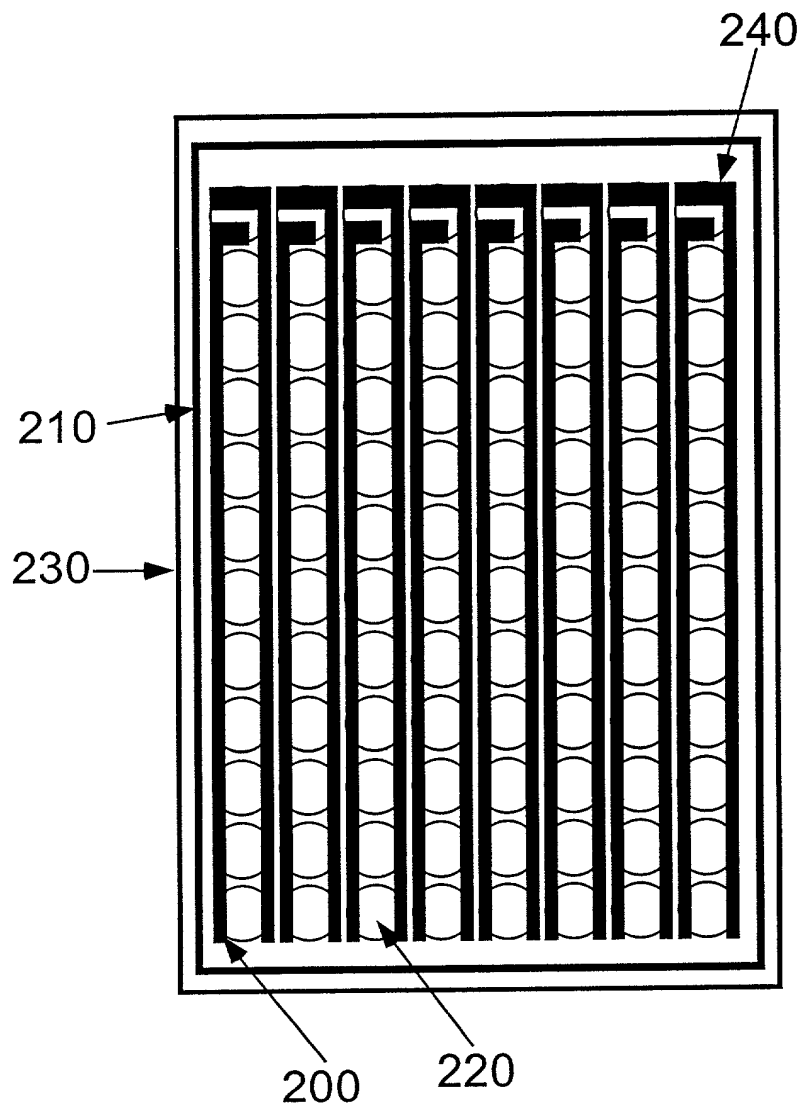


FIG. 2D

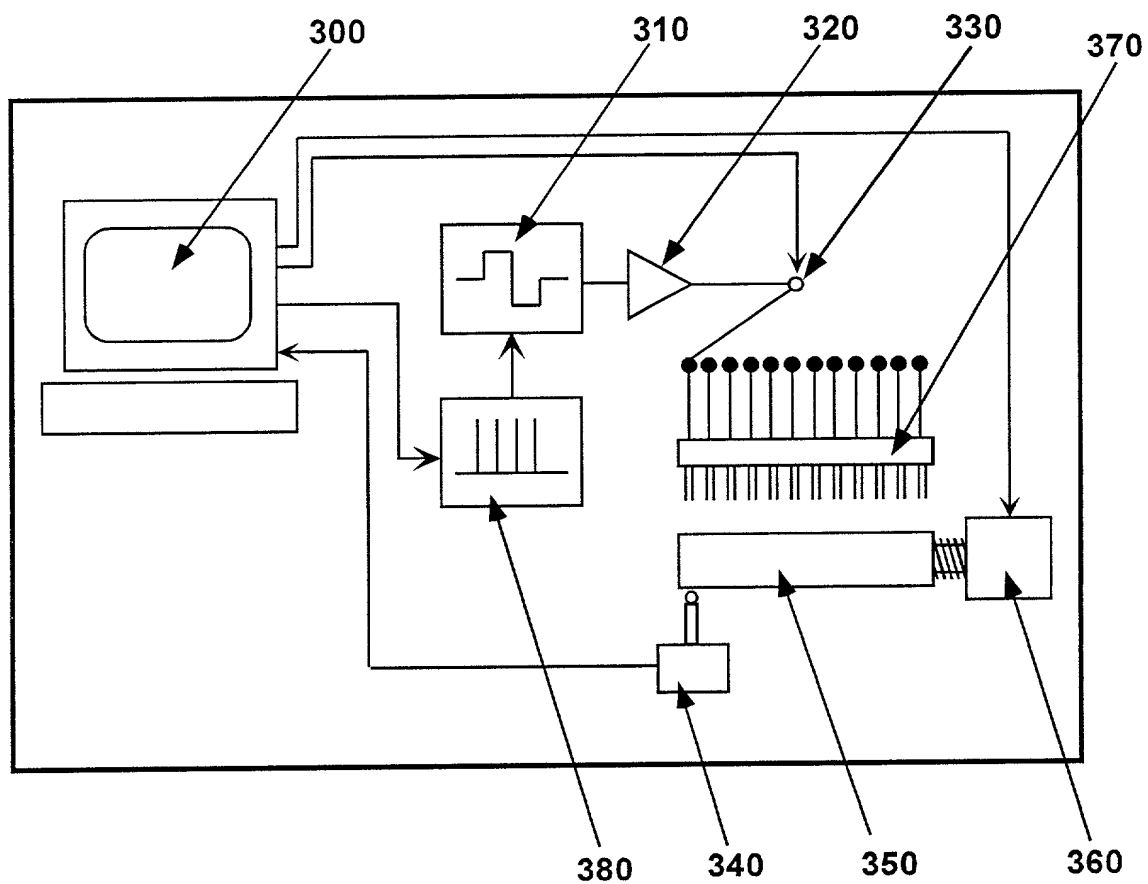


FIG. 3

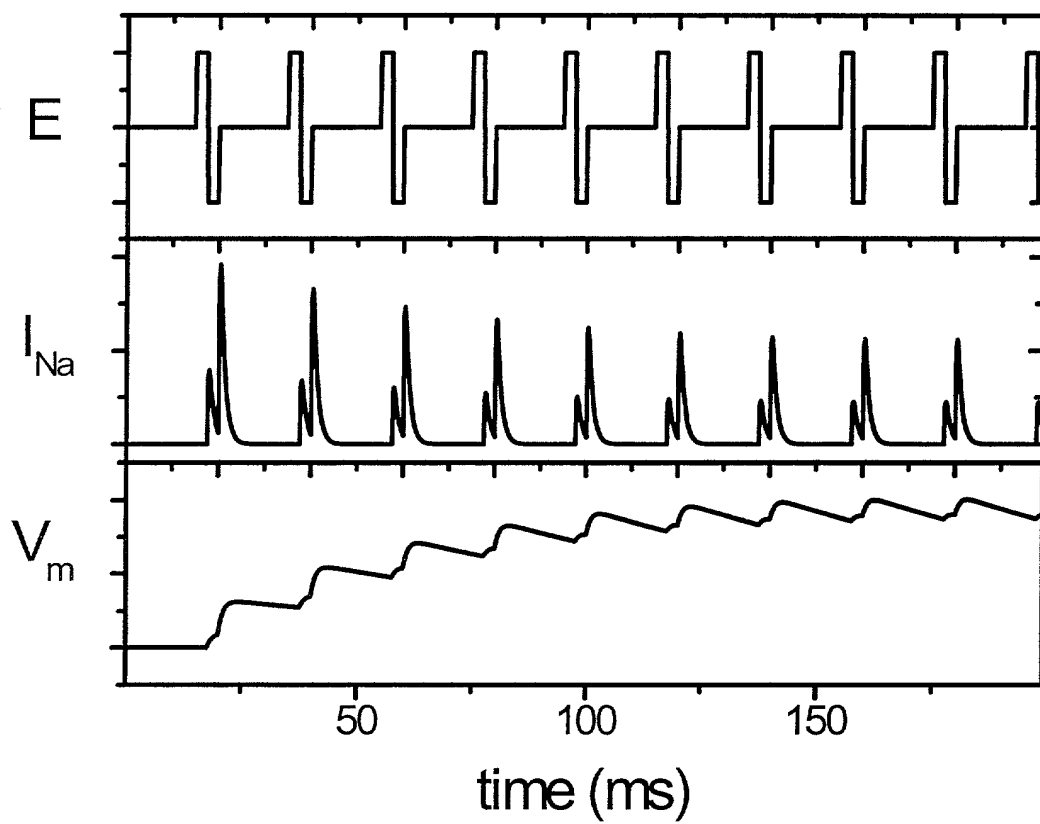


FIG. 4

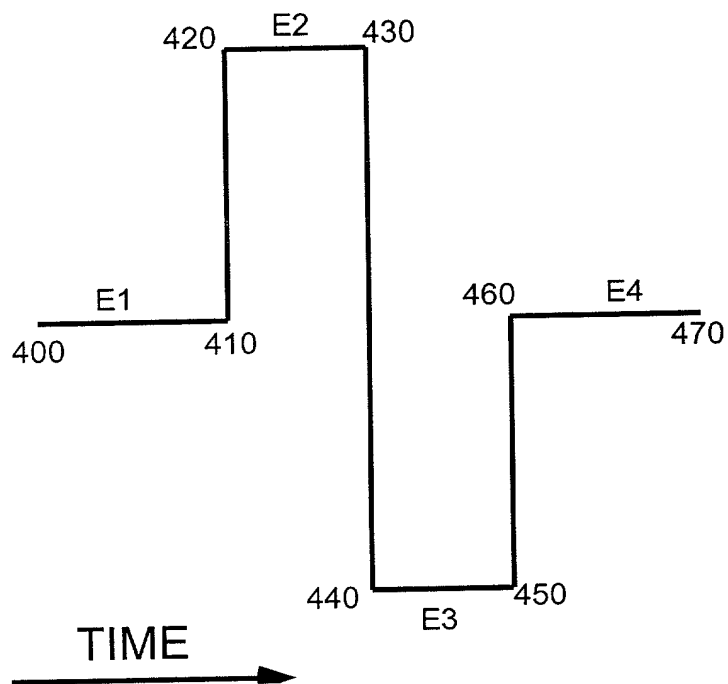


FIG. 5

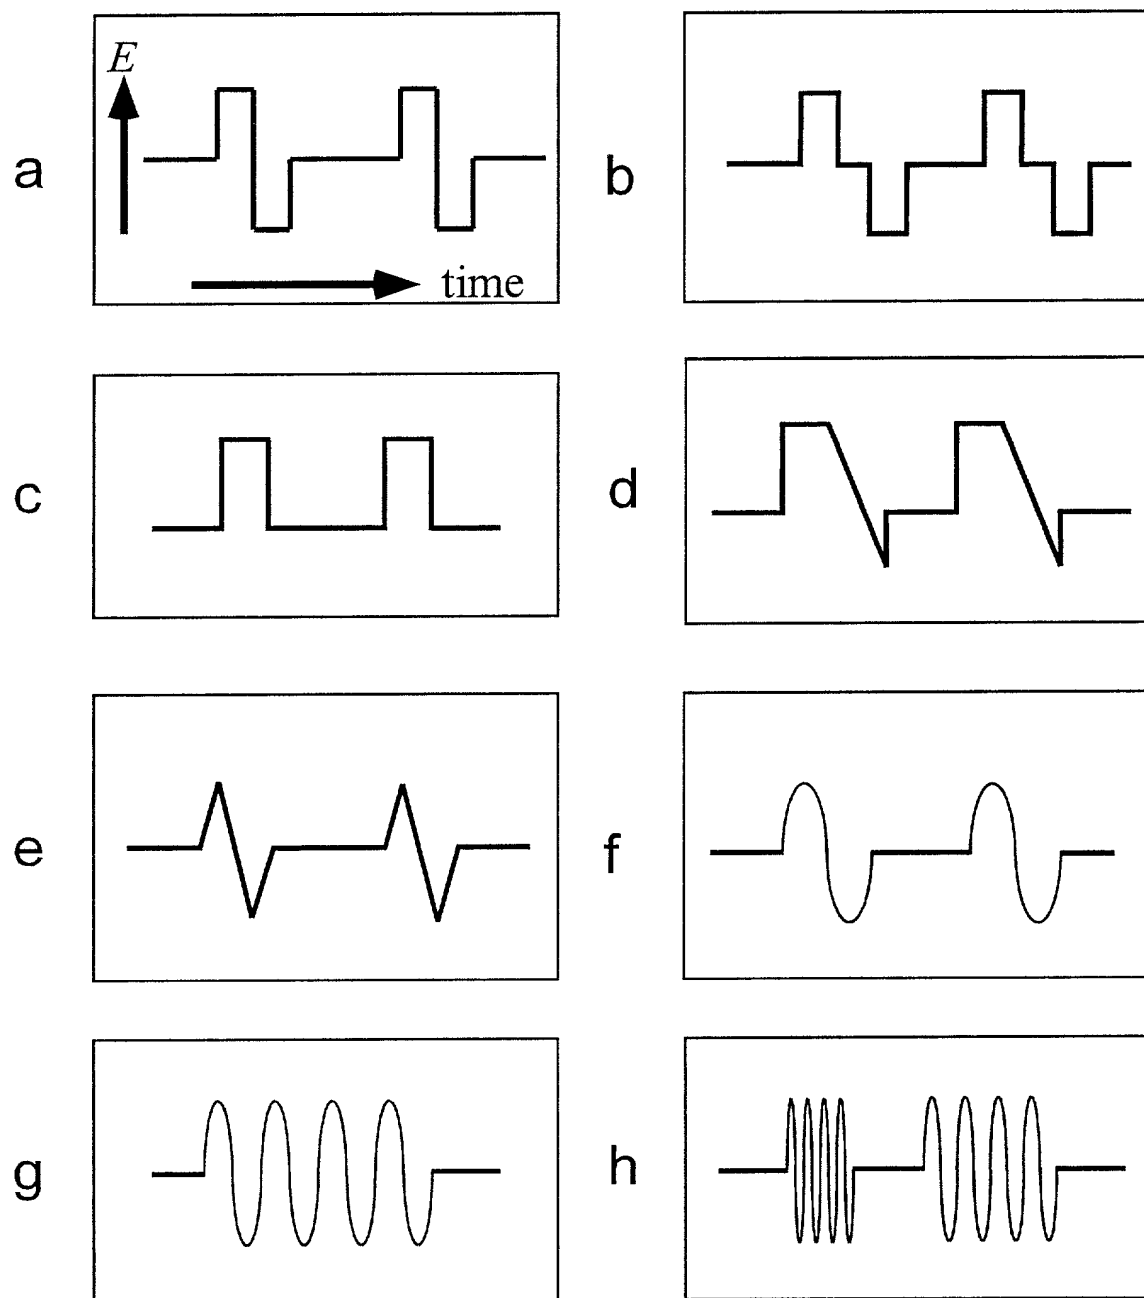


FIG. 6

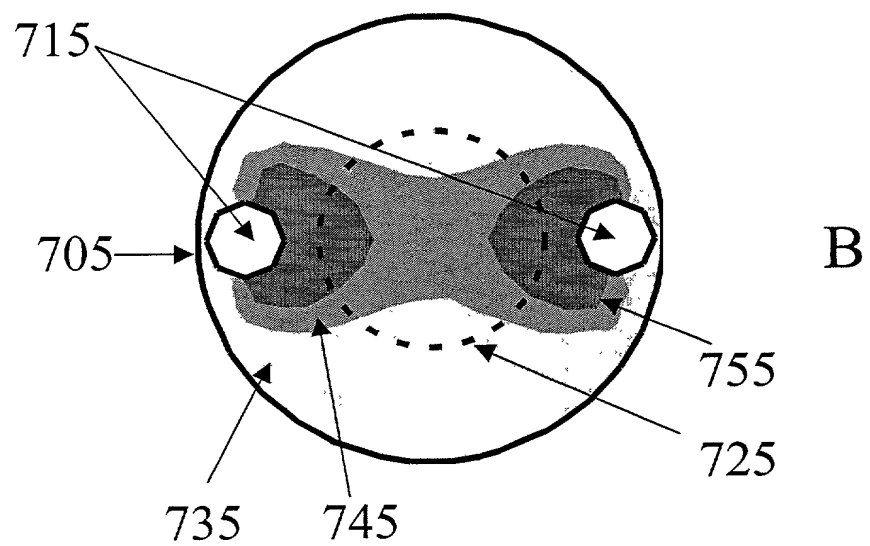
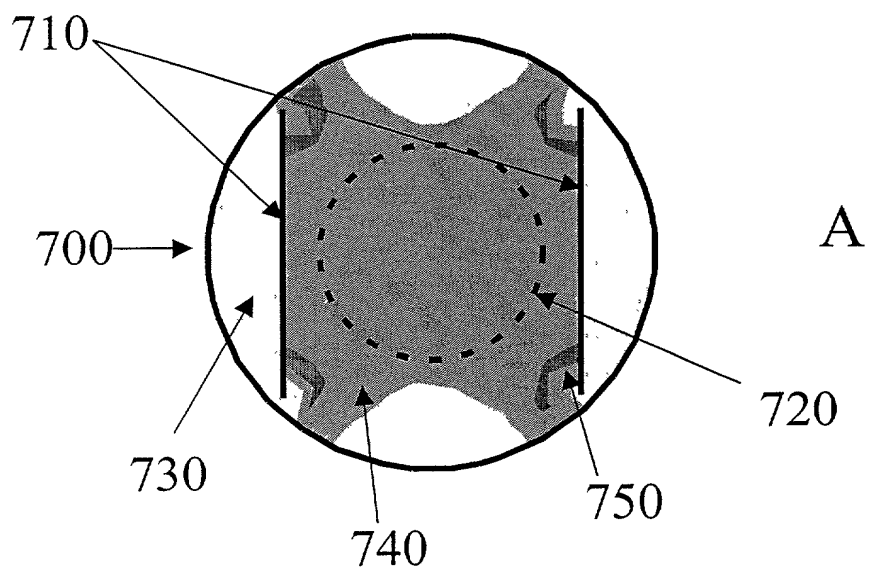


FIG. 7

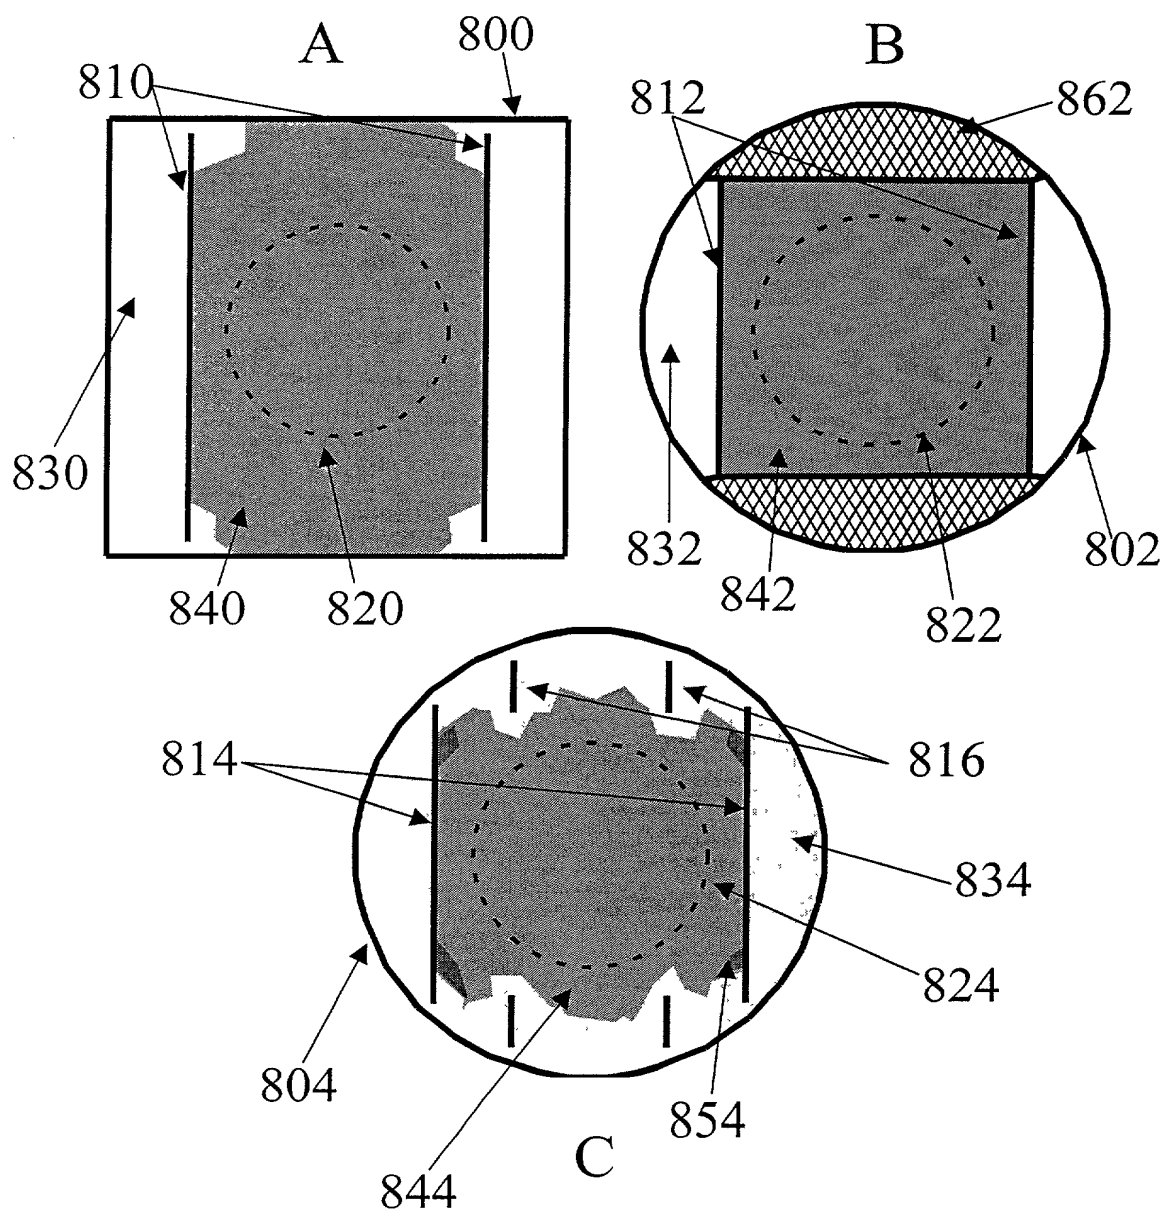


FIG. 8

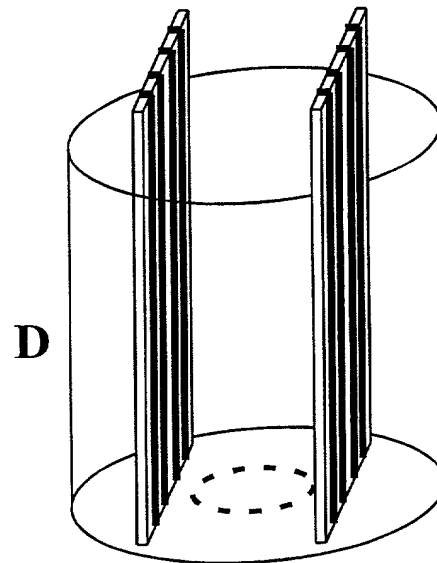
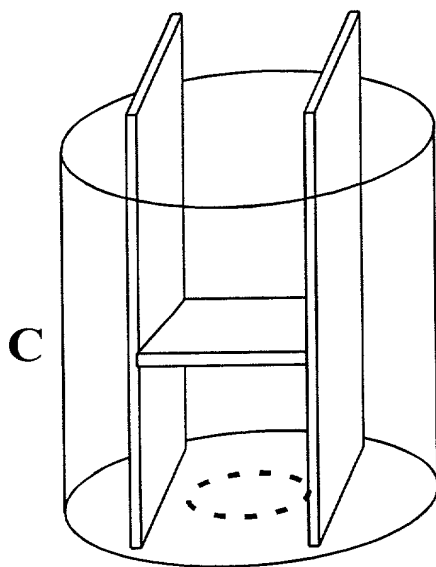
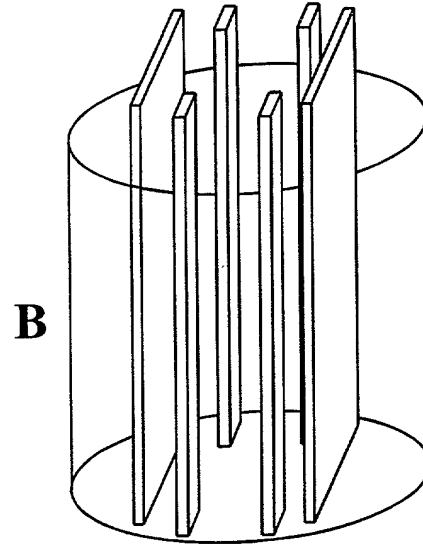
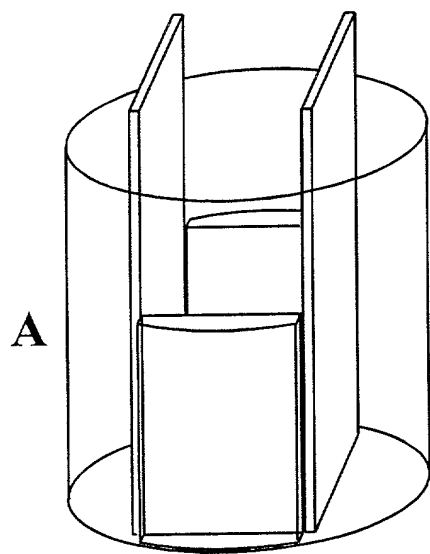


FIG. 9

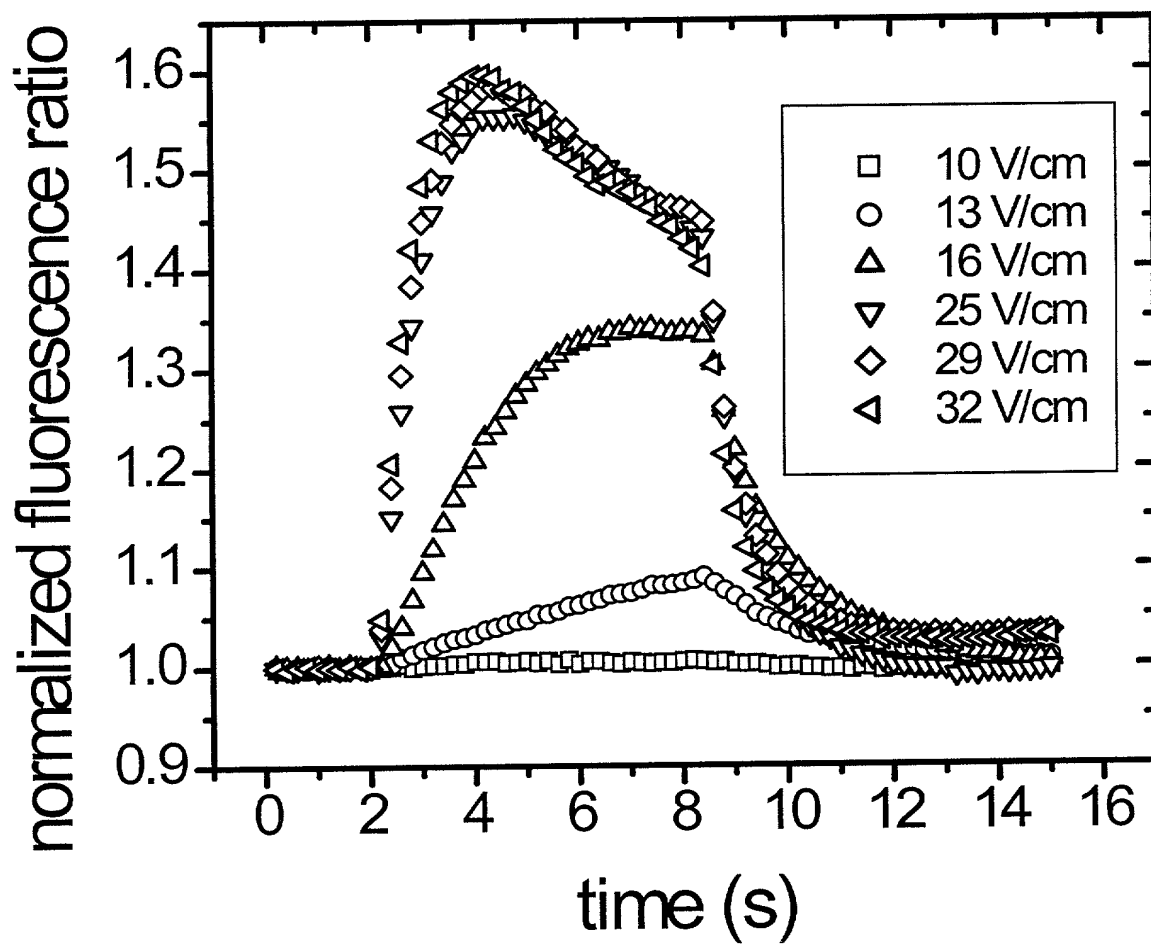


FIG. 10

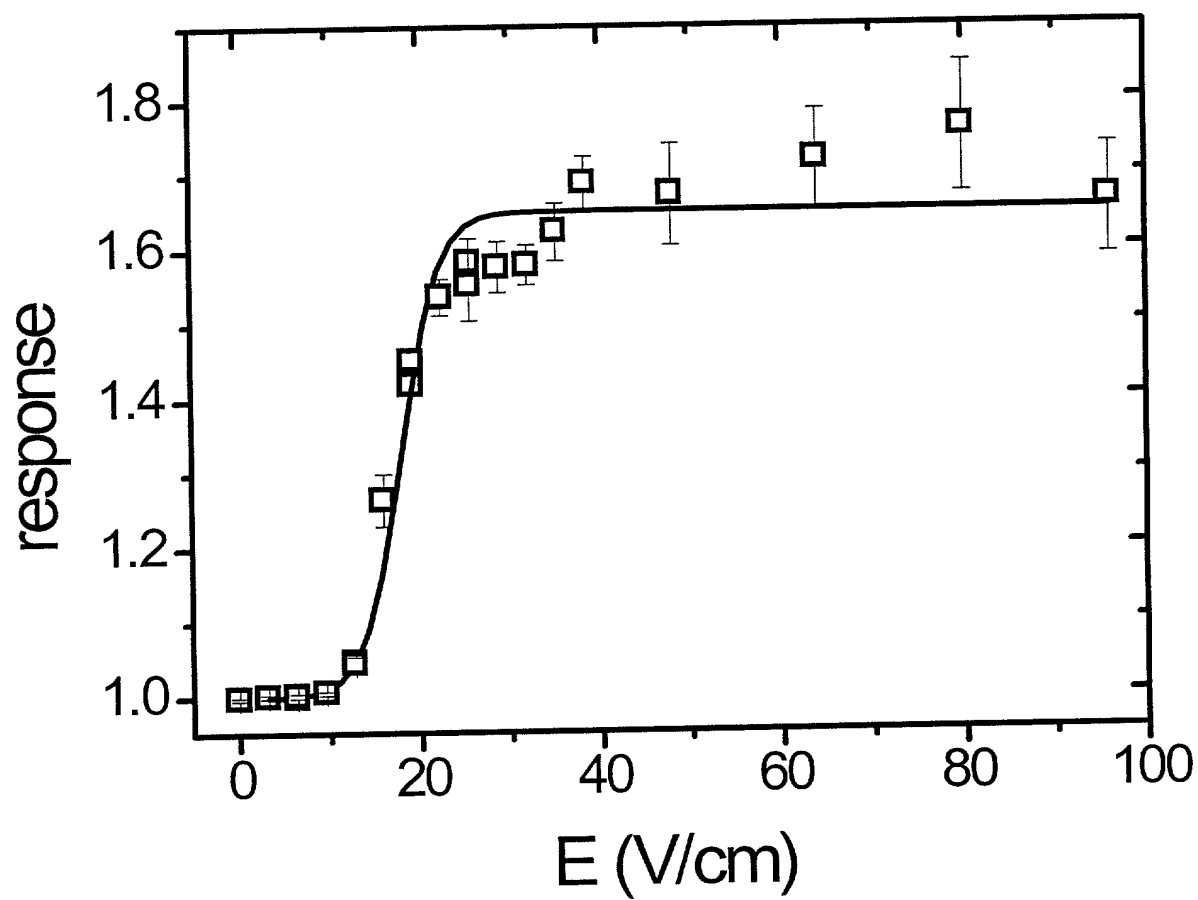


FIG. 11

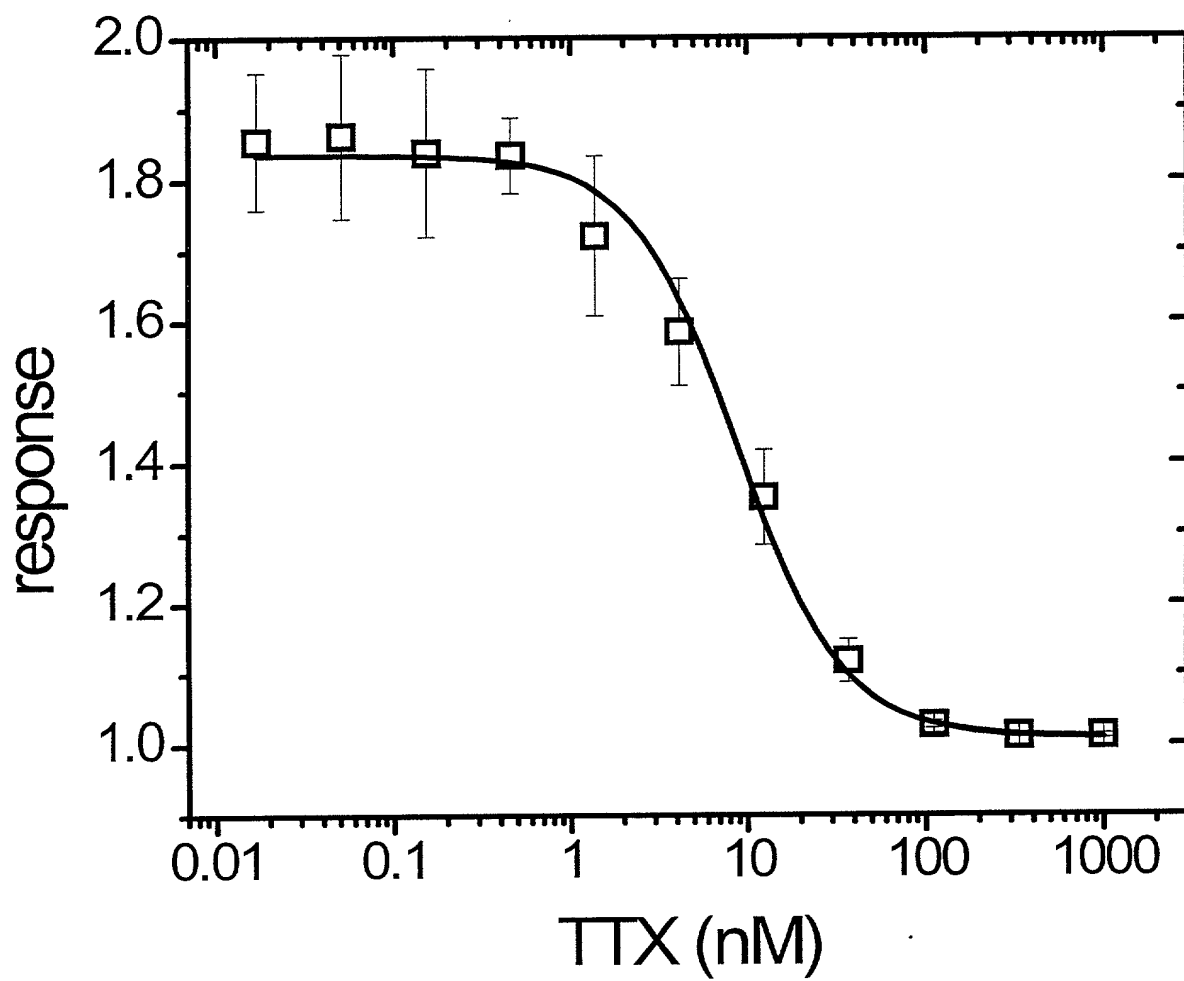


FIG. 12

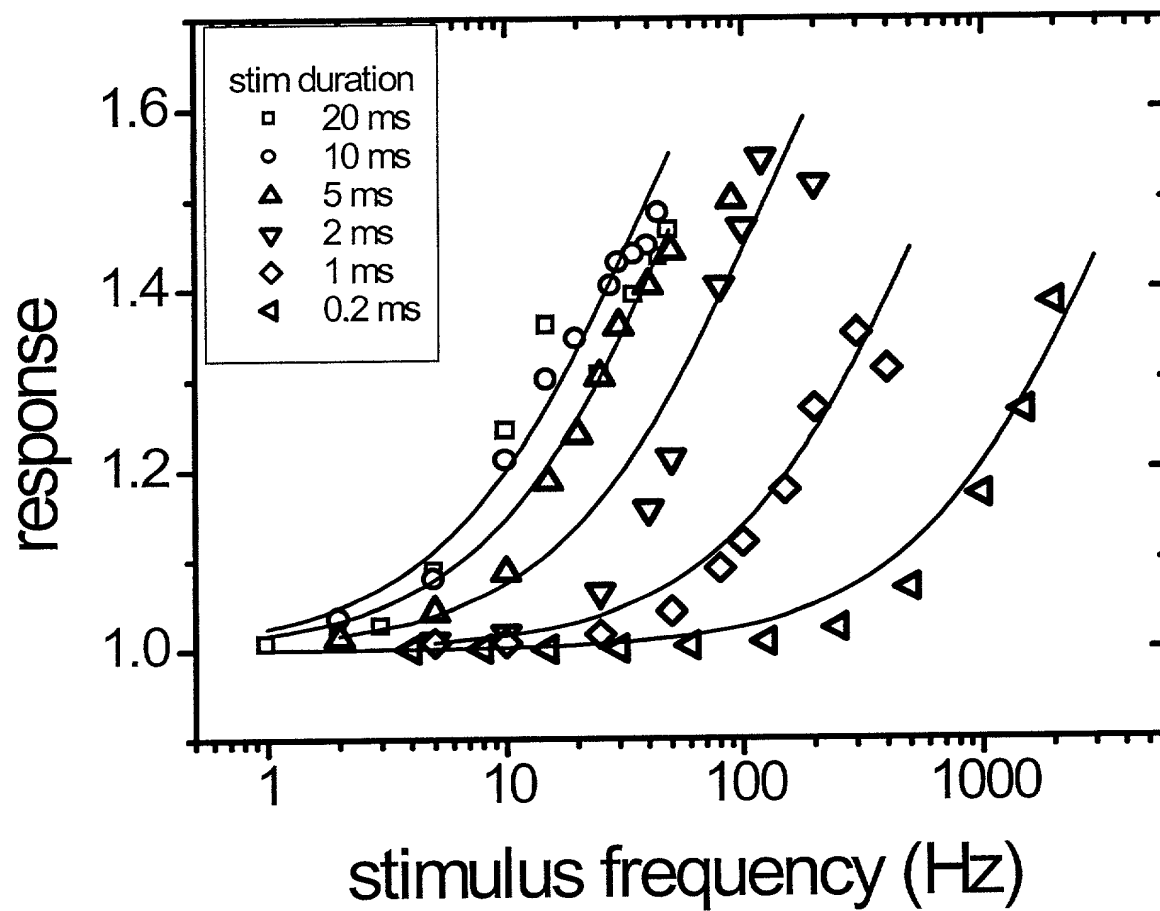


FIG. 13

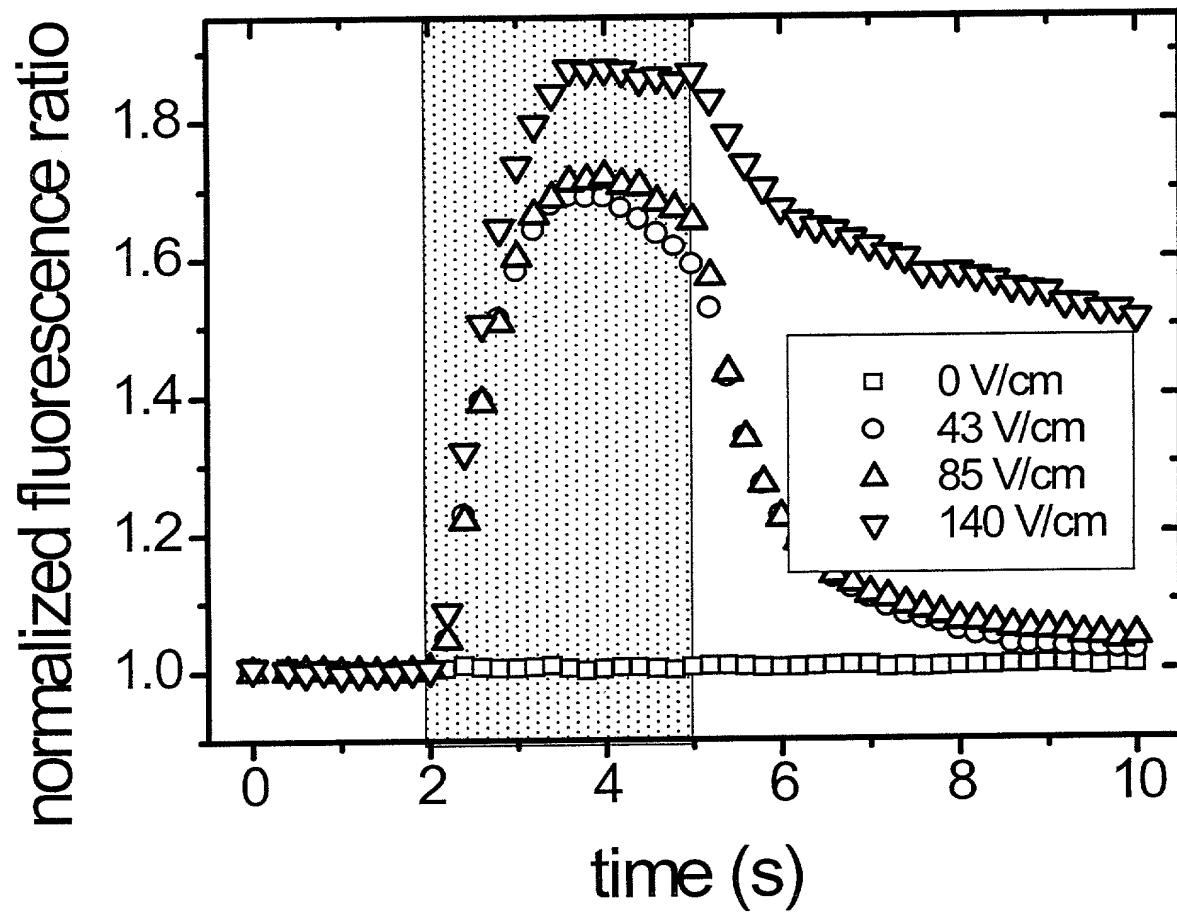


FIG. 14

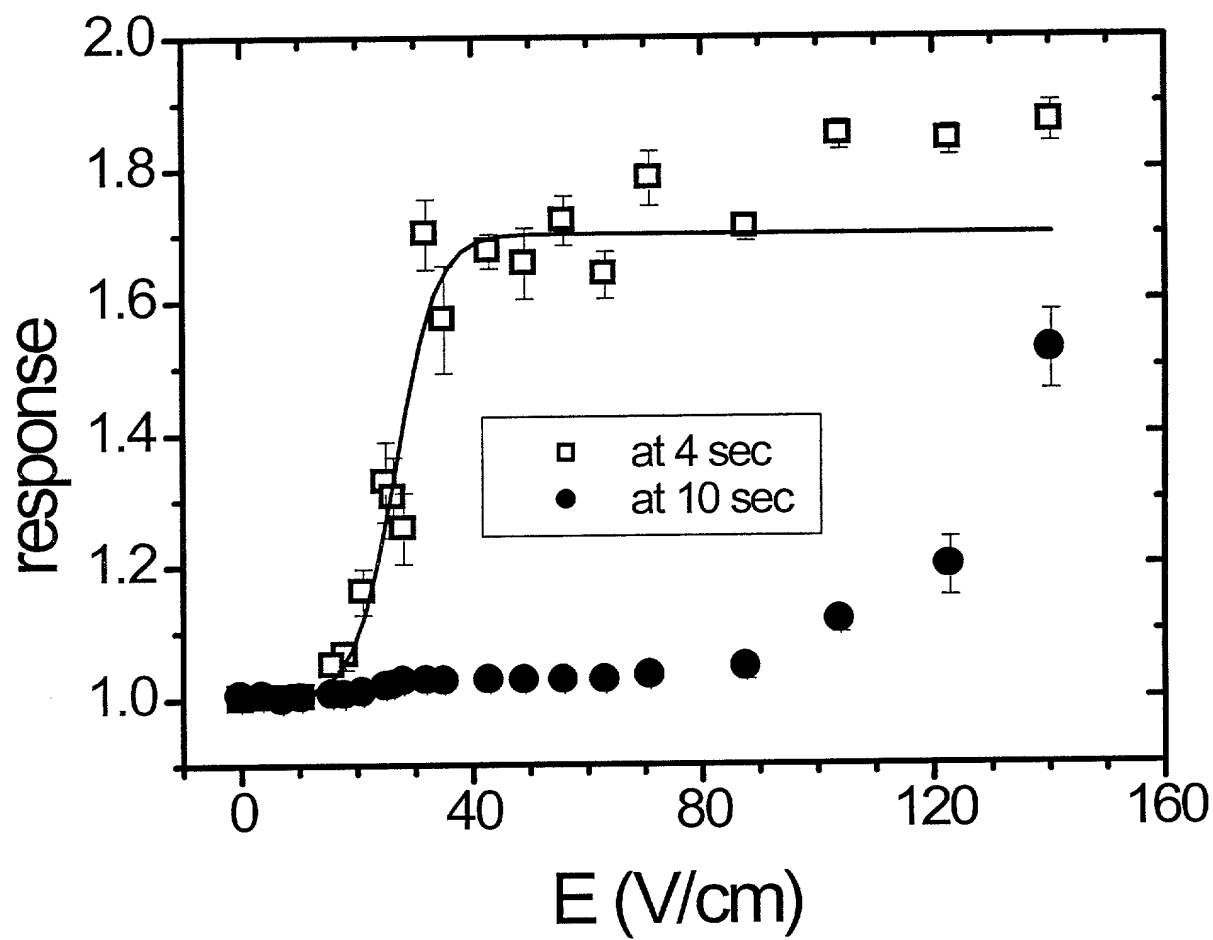


FIG. 15

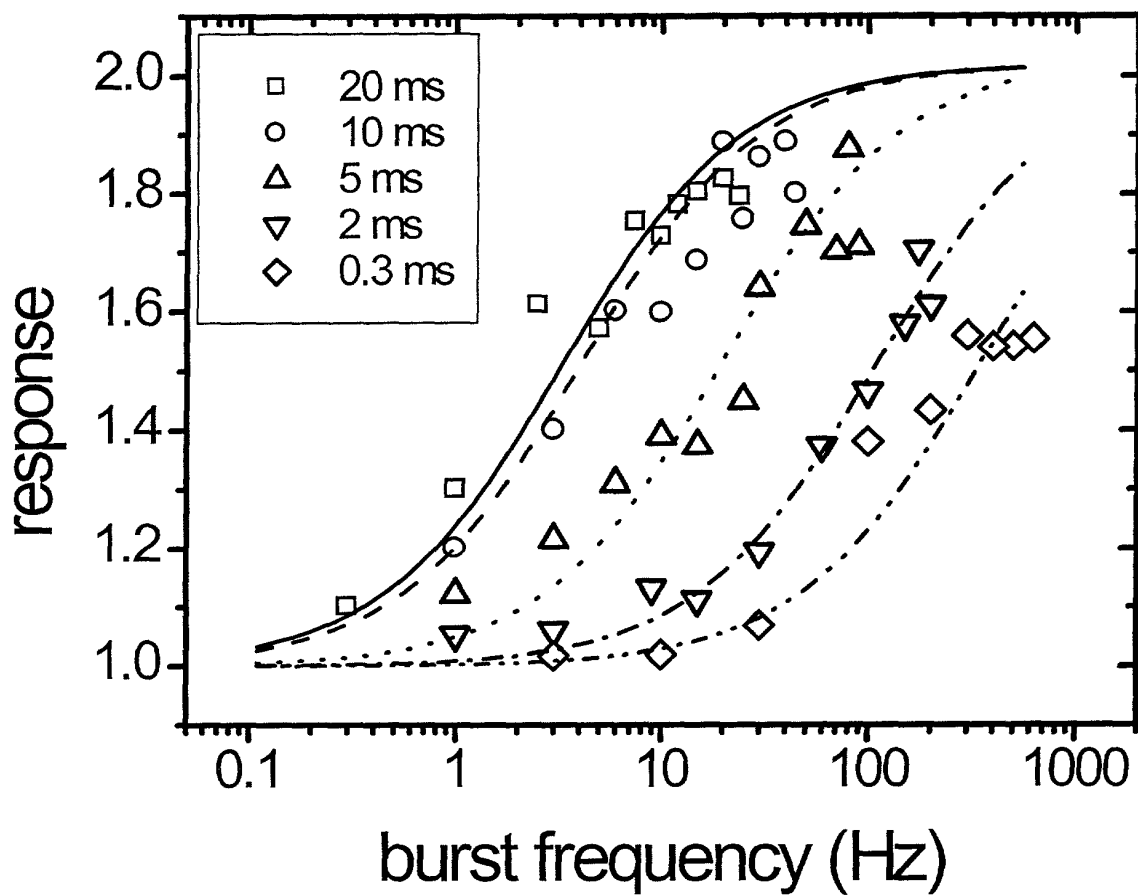


FIG. 16

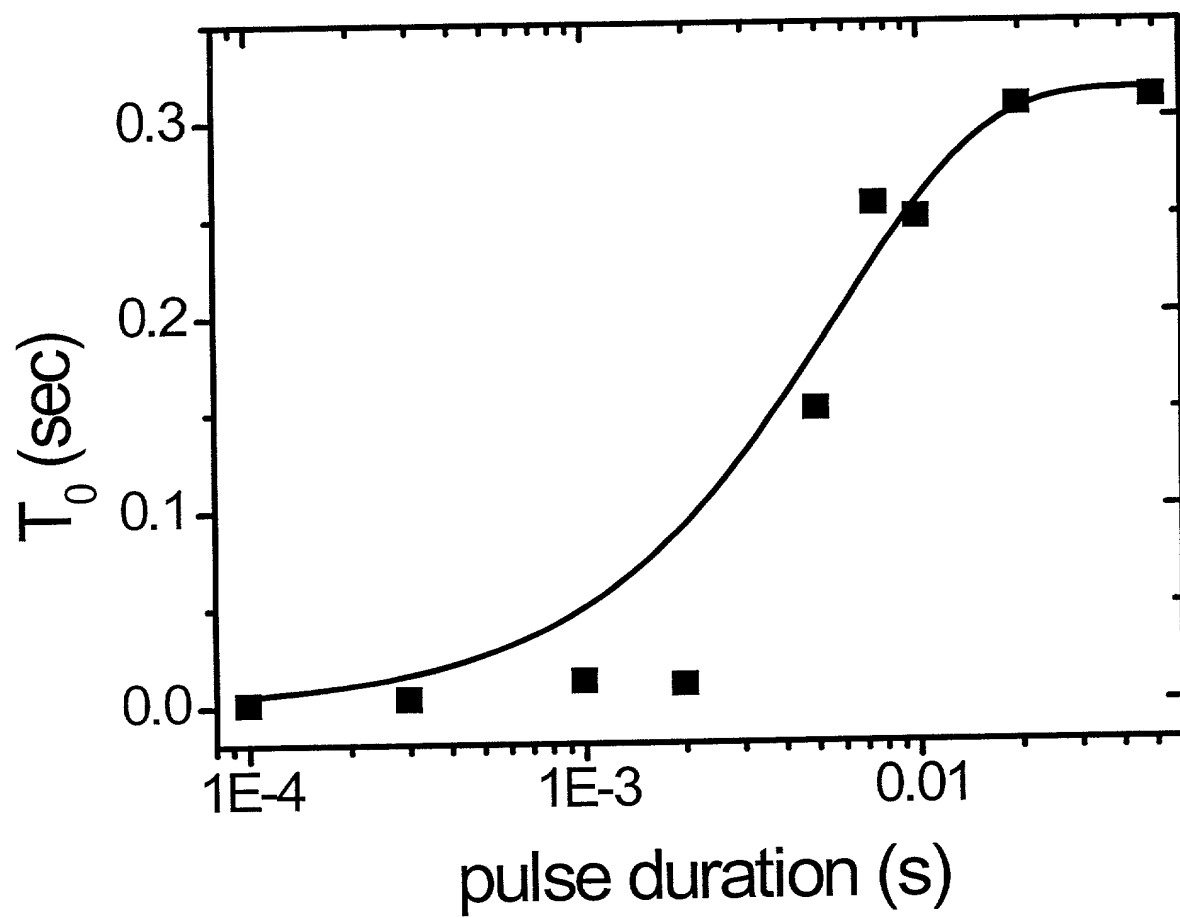


FIG. 17

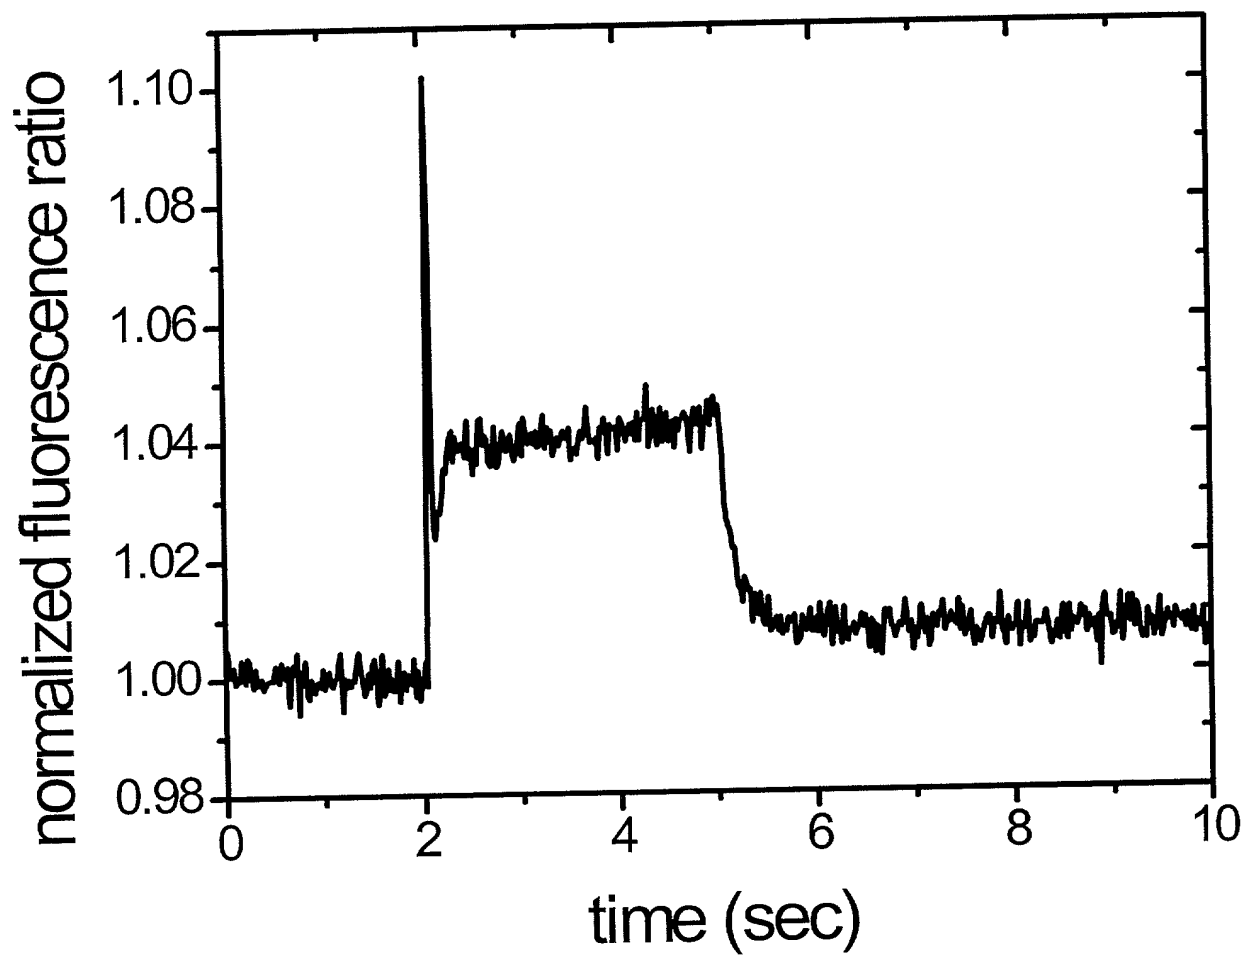


FIG. 18

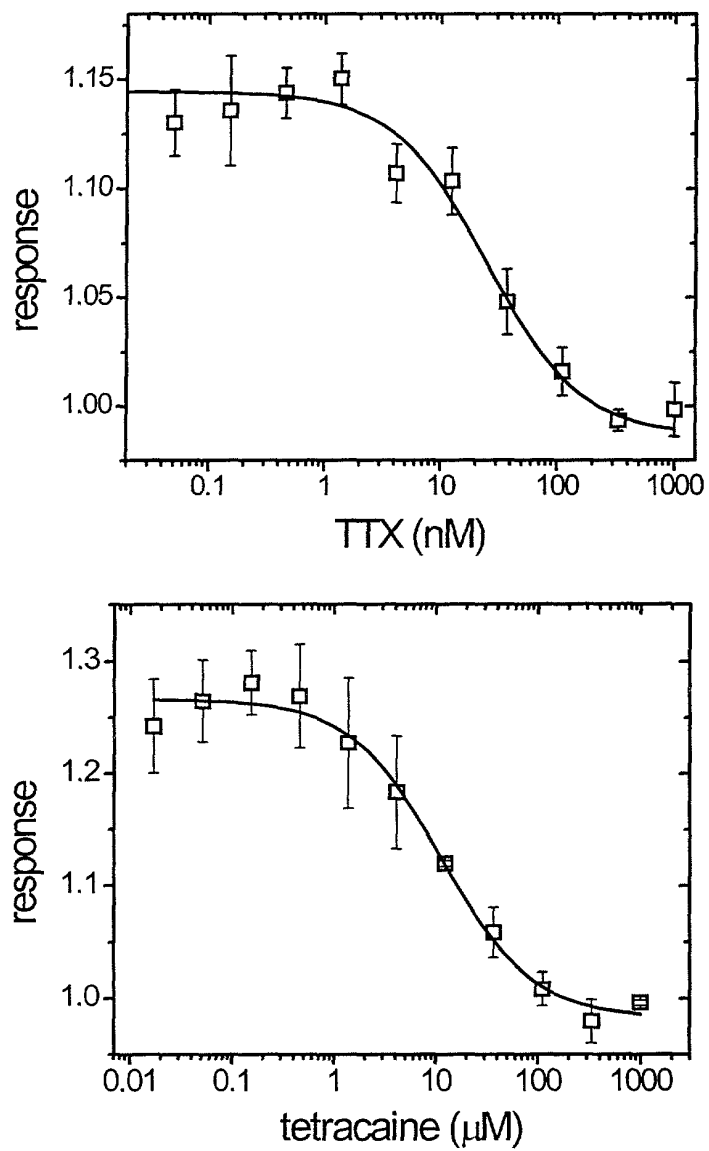


FIG. 19

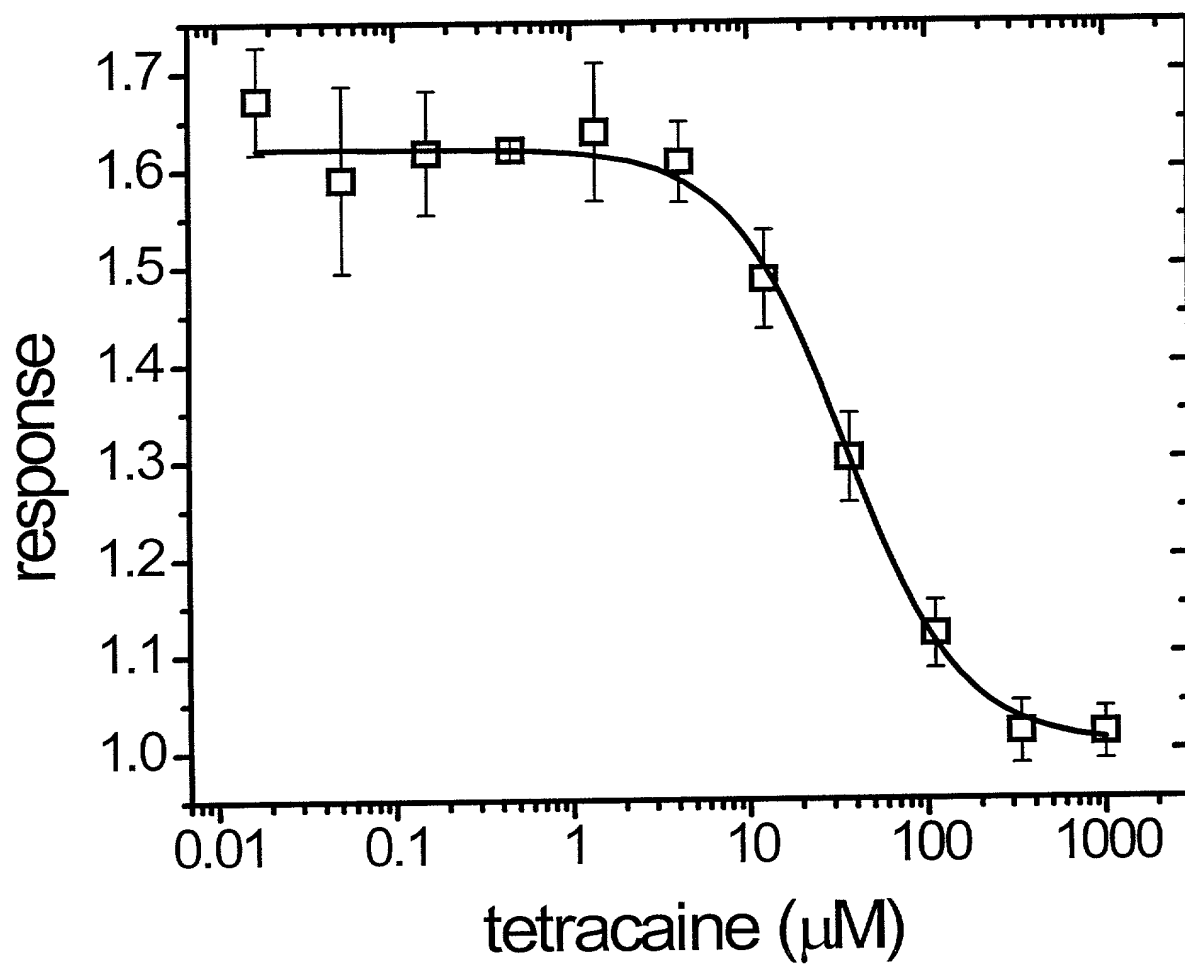


FIG. 20

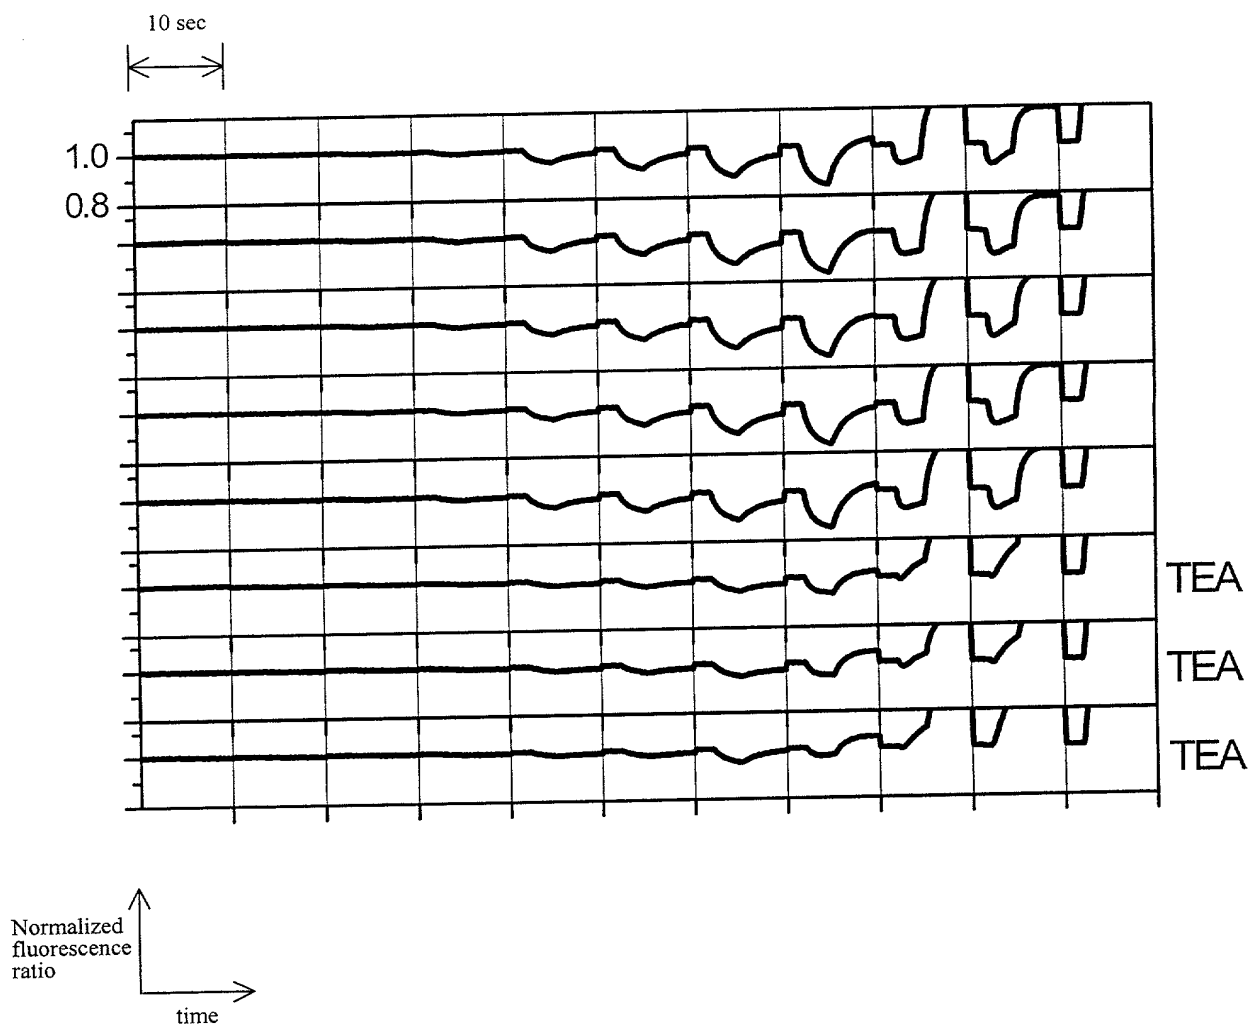


FIG. 21

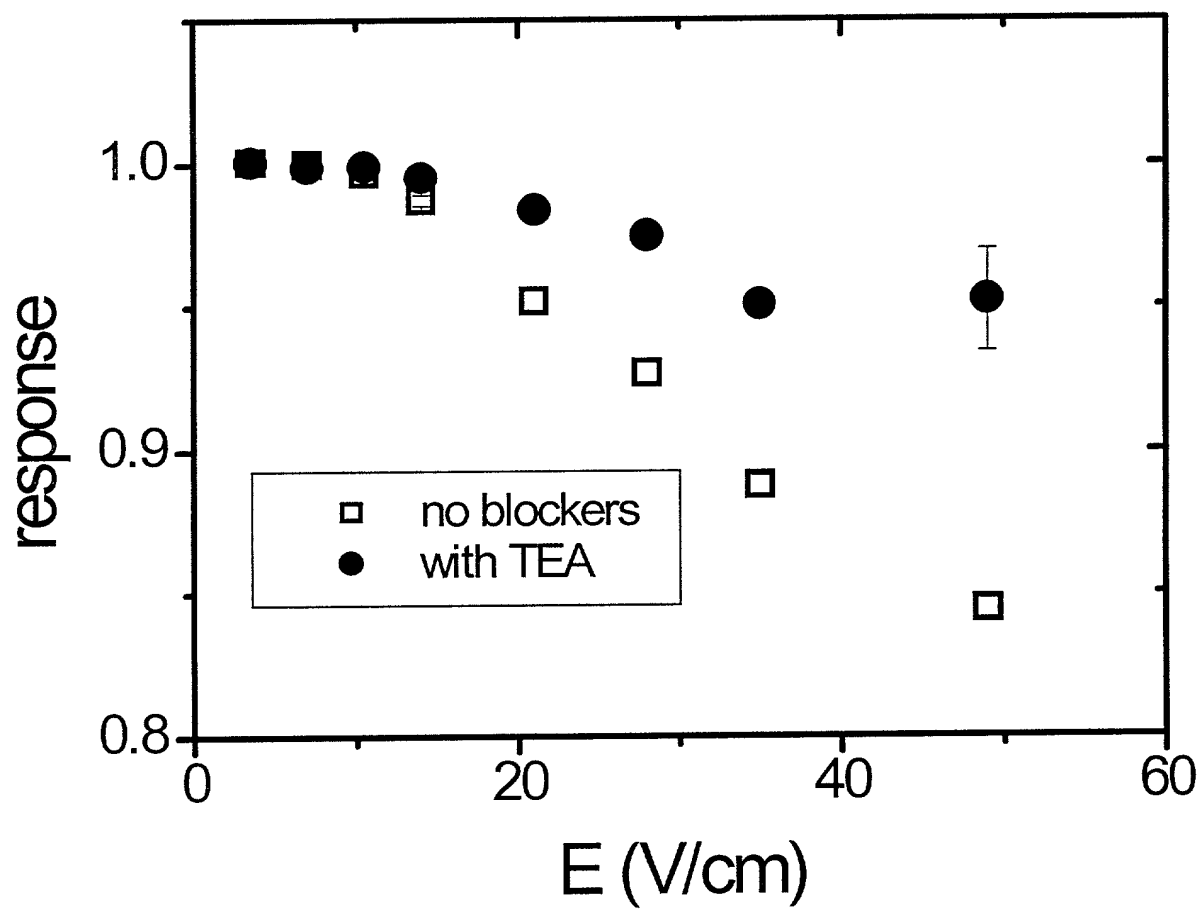


FIG. 22




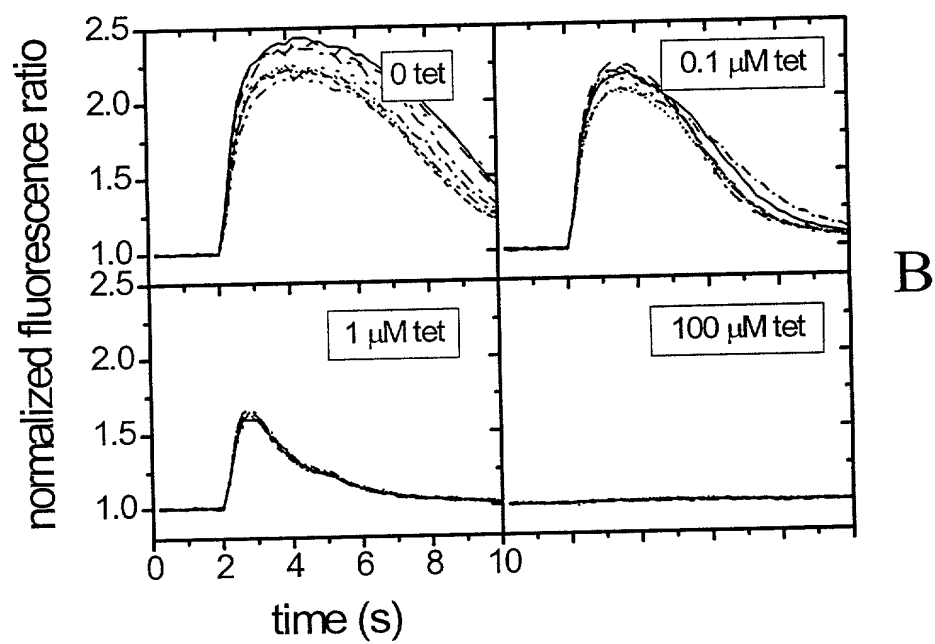


FIG. 23

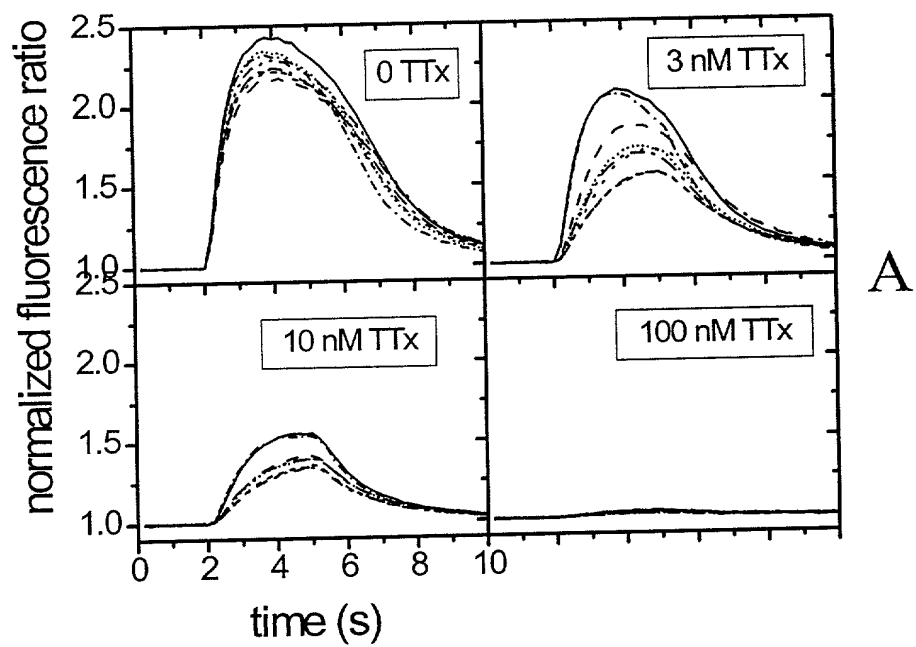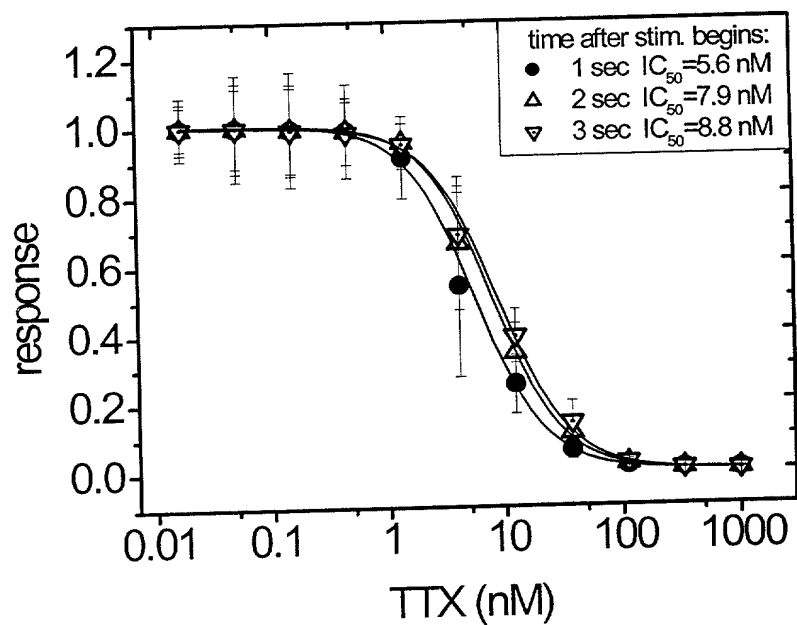

A

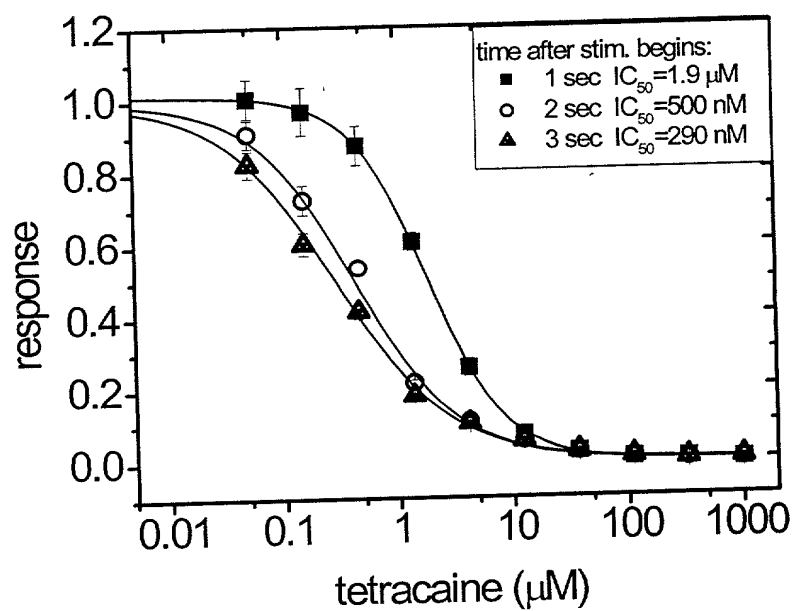

B

FIG. 24

apart from using a single channel, the use of a multi-channel system is also possible. The use of a multi-channel system is also possible.

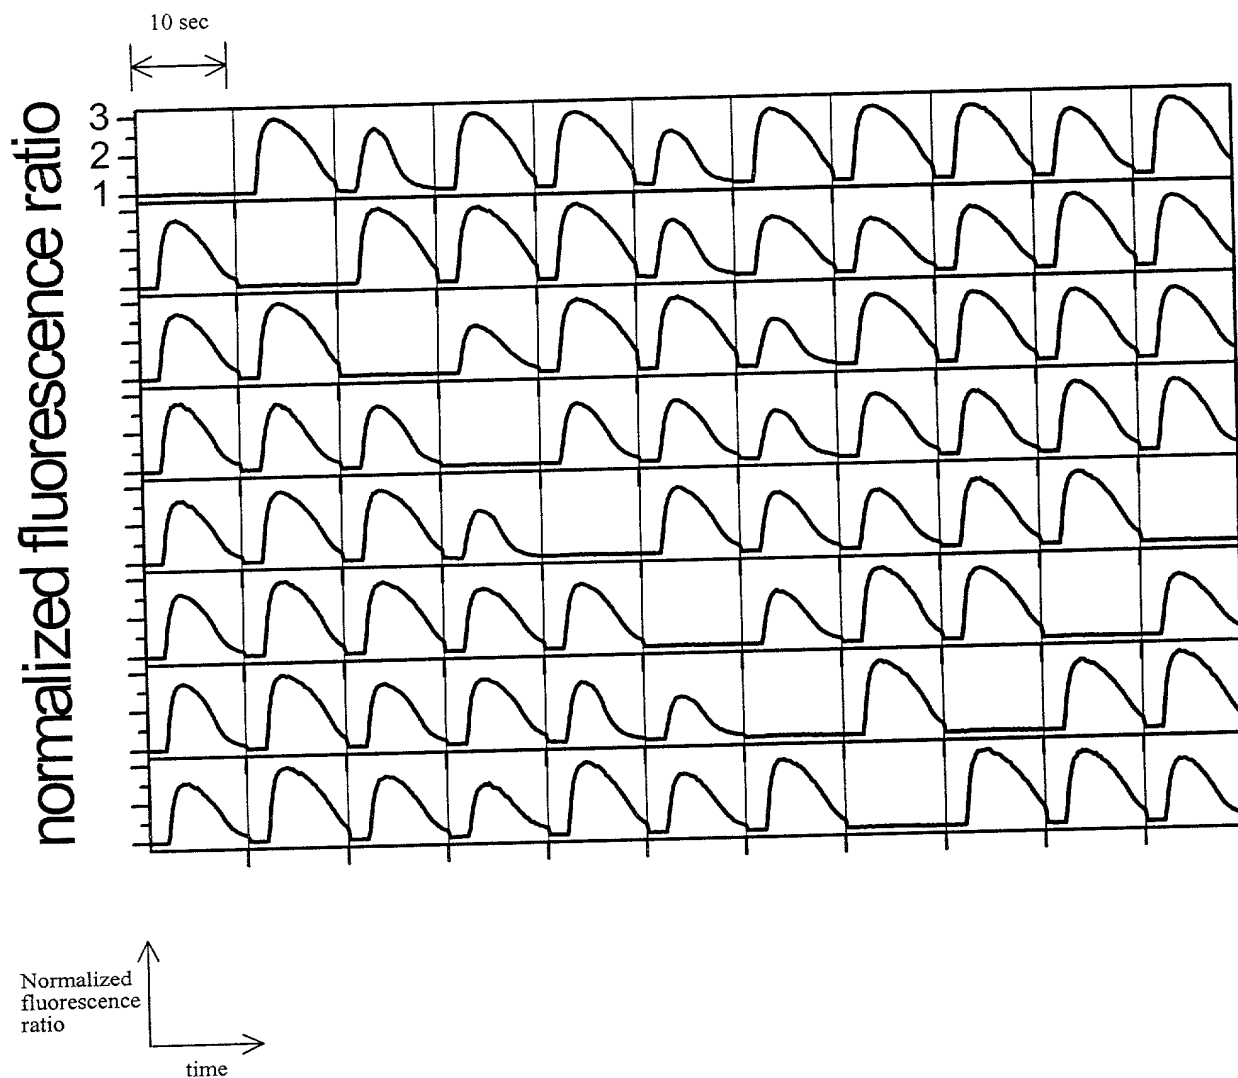


FIG. 25

Figure 26 shows the response of the system to a step change in the input. The response is shown for a system with a time constant of 10 seconds. The response is shown for a system with a time constant of 10 seconds.

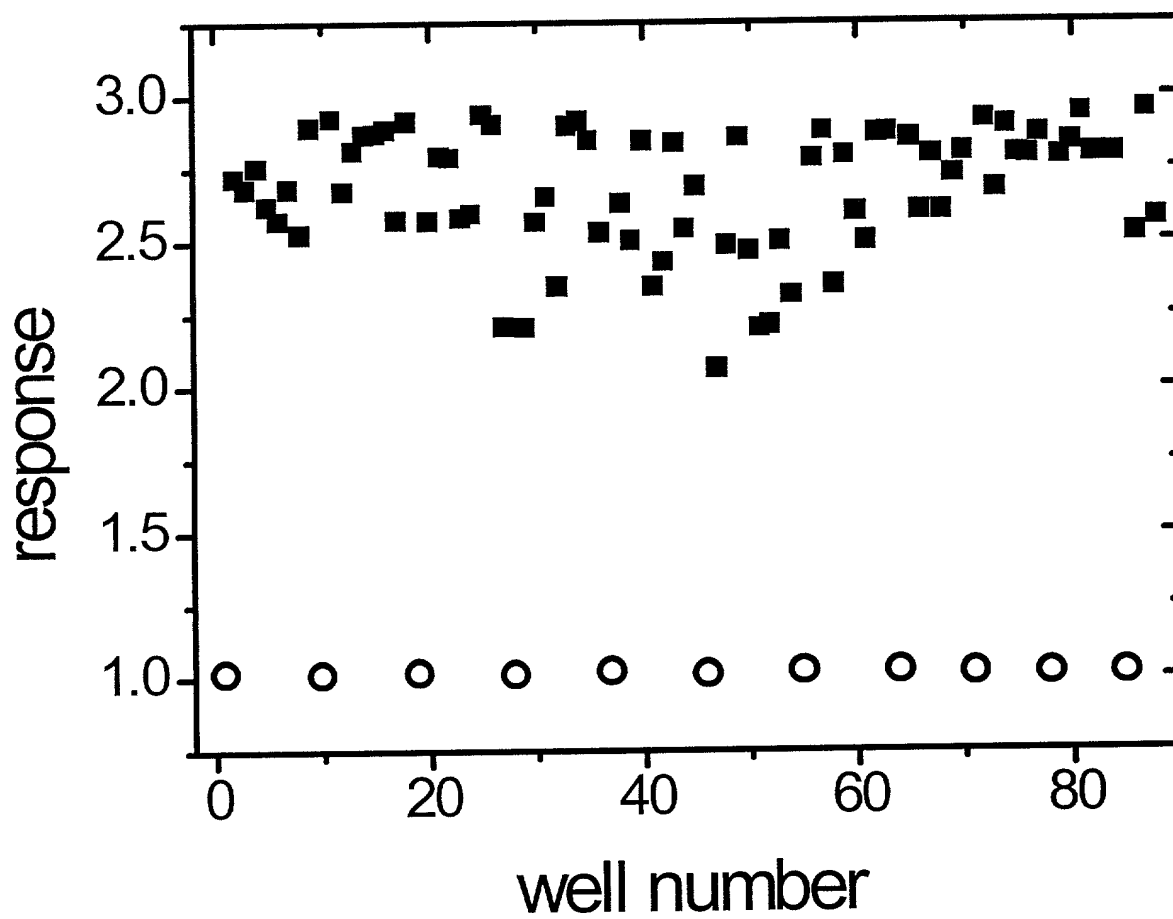


FIG. 26

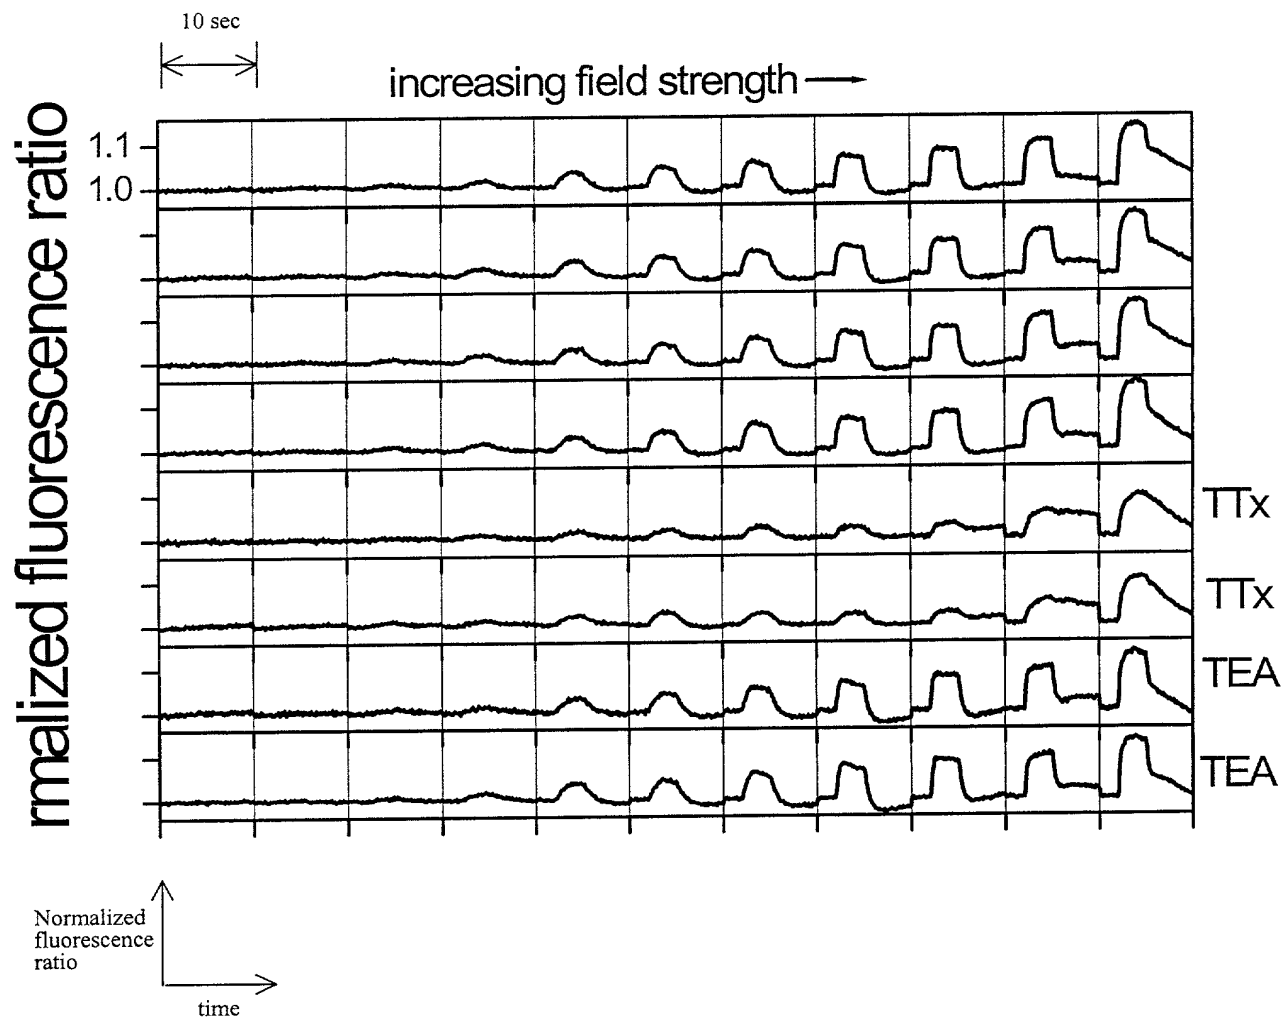


FIG. 27

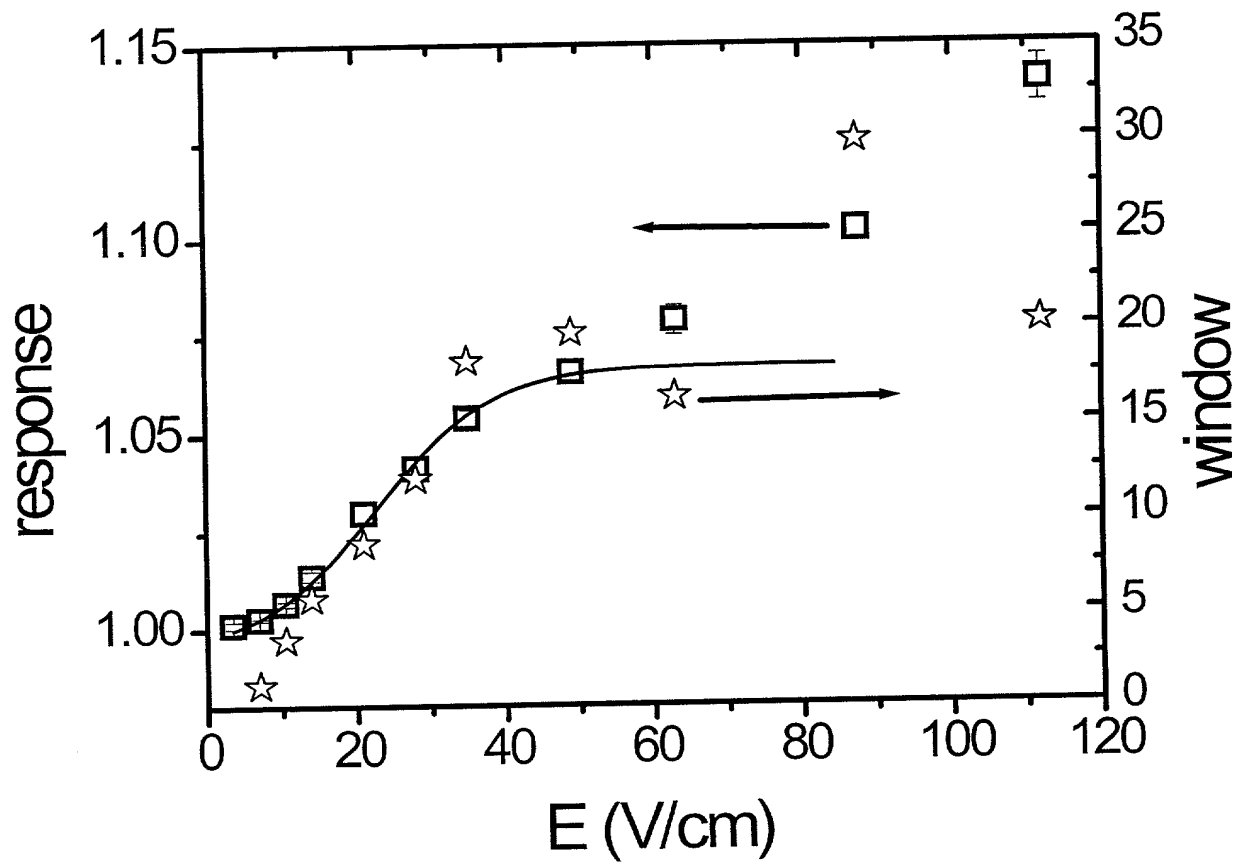


FIG. 28

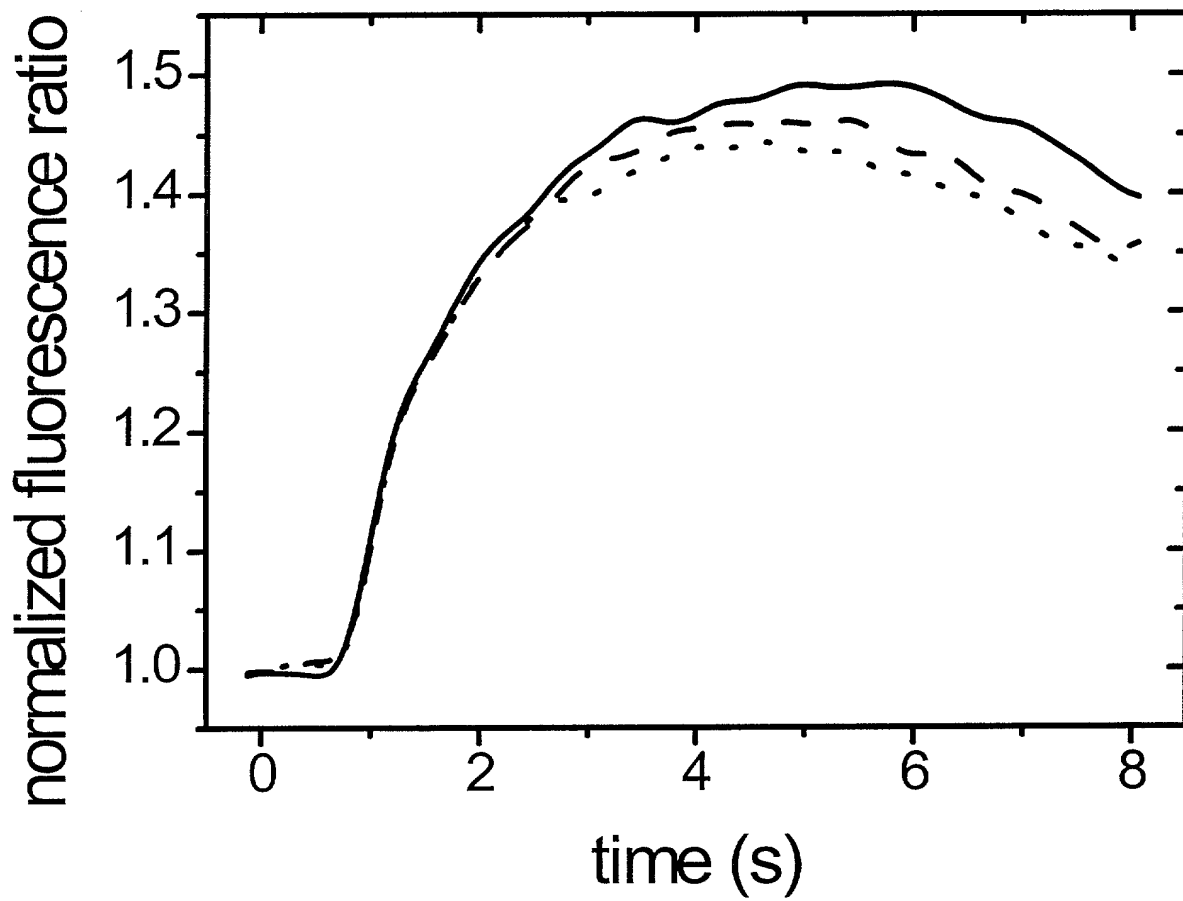


FIG. 29

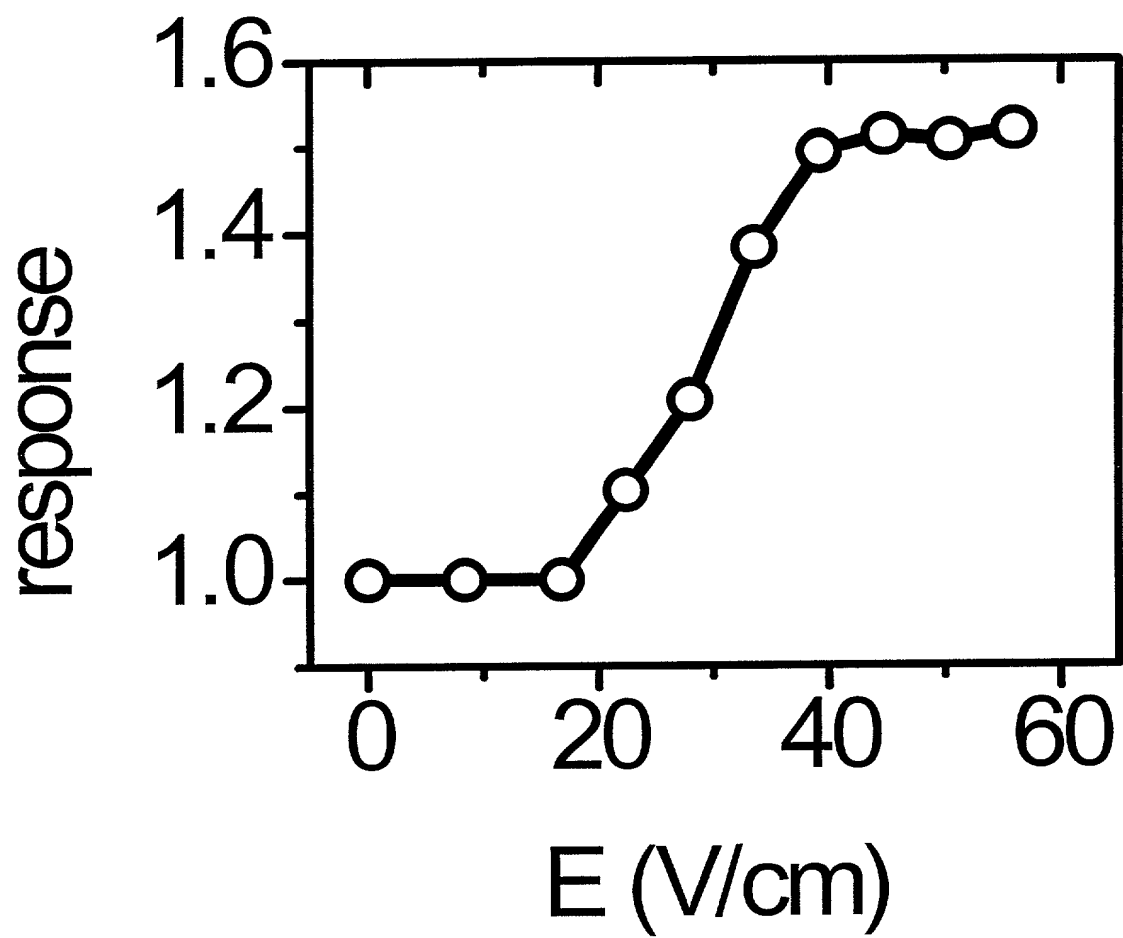


FIG. 30

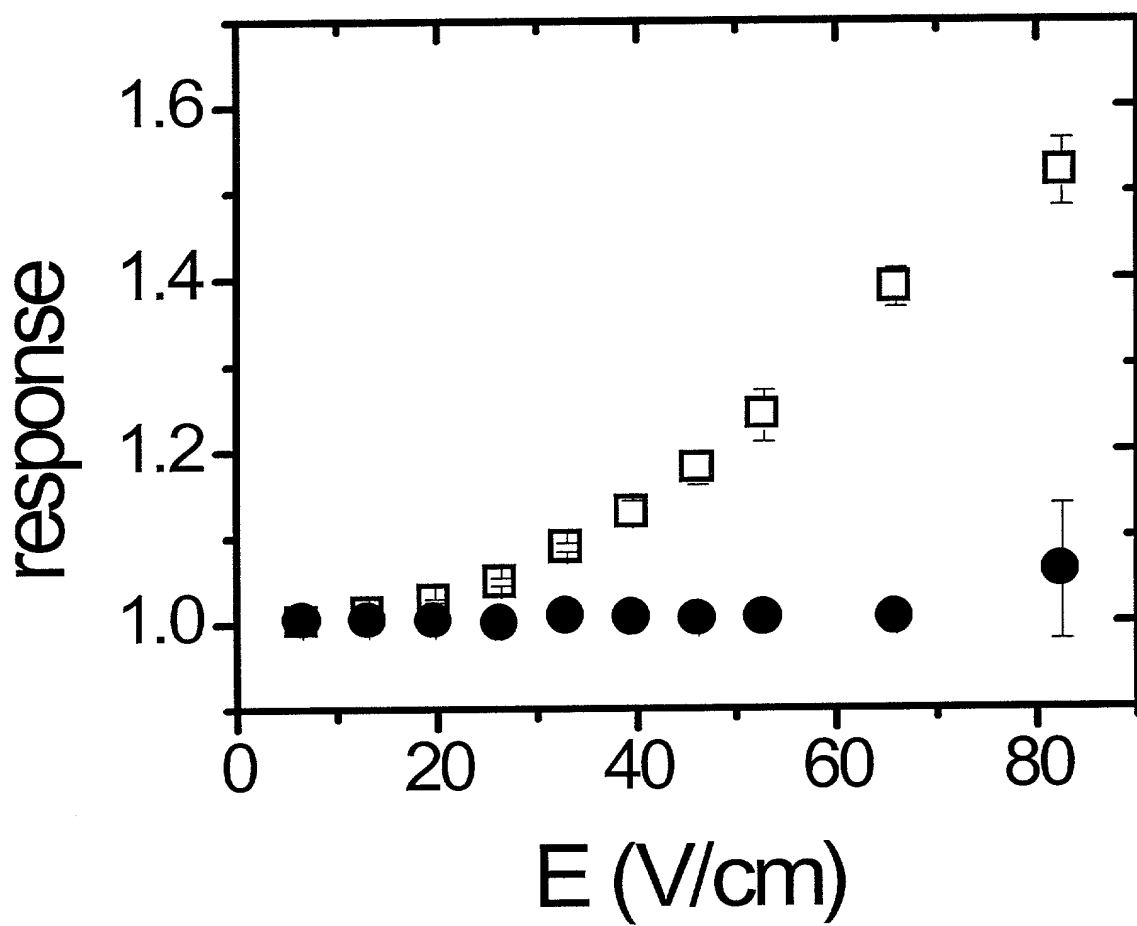


FIG. 31